



**US Army Corps
of Engineers**
Waterways Experiment
Station


Miscellaneous Paper CERC-94-17
September 1994

AD-A285 243



Wave Response of Proposed Improvement Plan 6 to the Small Boat Harbor at Maalaea, Maui, Hawaii

by Edward F. Thompson, Lori L. Hadley



Approved For Public Release; Distribution Is Unlimited

DEC 07 1994

94-31655



Prepared for U.S. Army Engineer Division, Pacific Ocean

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.



PRINTED ON RECYCLED PAPER

Wave Response of Proposed Improvement Plan 6 to the Small Boat Harbor at Maalaea, Maui, Hawaii

by Edward F. Thompson, Lori L. Hadley

U.S. Army Corps of Engineers
Waterways Experiment Station
3909 Halls Ferry Road
Vicksburg, MS 39180-6199

Accession For	
NTIS CRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	


Final report

Approved for public release; distribution is unlimited

Prepared for U.S. Army Engineer Division, Pacific Ocean
Bldg. 230, Fort Shafter, HI 96858-5440



**US Army Corps
of Engineers**
Waterways Experiment
Station

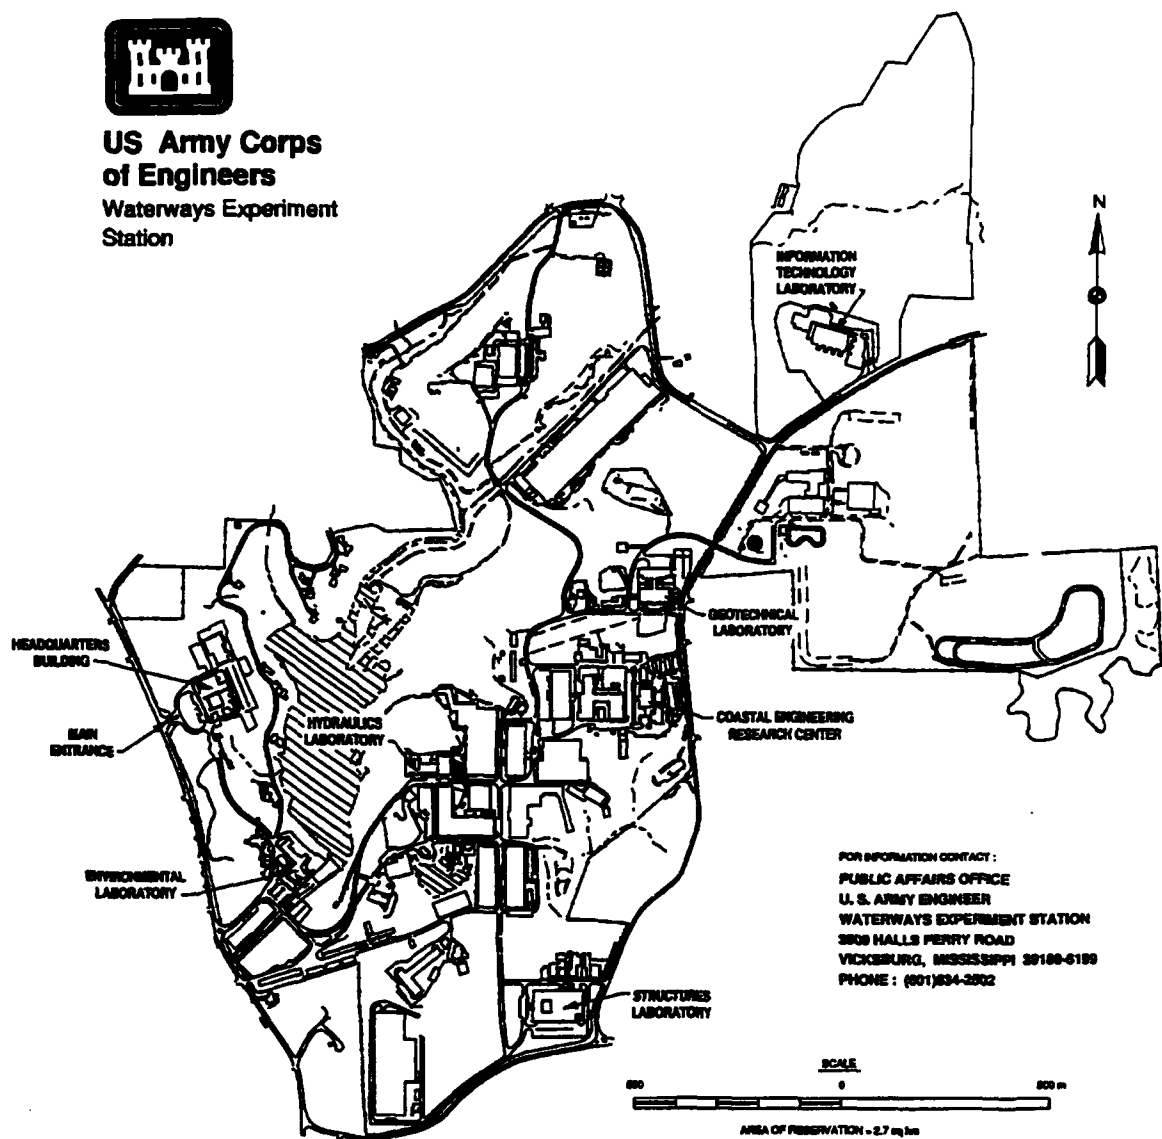

FOR INFORMATION CONTACT:
PUBLIC AFFAIRS OFFICE
U. S. ARMY ENGINEER
WATERWAYS EXPERIMENT STATION
3808 HALLS FERRY ROAD
VICKSBURG, MISSISSIPPI 39180-6199
PHONE: (601) 634-2502

Waterways Experiment Station Cataloging-in-Publication Data

Thompson, Edward F.

Wave response of proposed improvement plan 6 to the small boat harbor at Maalaea, Maui, Hawaii / by Edward F. Thompson, Lori L. Hadley ; prepared for U.S. Army Engineer Division, Pacific Ocean.

47 p. : ill. ; 28 cm. — (Miscellaneous paper ; CERC-94-17)

Includes bibliographic references.

1. Harbors — Hydrodynamics — Mathematical models. 2. Marinas — Hawaii — Maalaea Bay. 3. Ocean waves — Hawaii — Maui — Mathematical models. 4. Wind waves — Hawaii — Maalaea Bay — Mathematical models. I. Hadley, Lori L. II. United States. Army. Corps of Engineers. Pacific Ocean Division. III. U.S. Army Engineer Waterways Experiment Station. IV. Coastal Engineering Research Center (U.S.) V. Title. VI. Series: Miscellaneous paper (U.S. Army Engineer Waterways Experiment Station) ; CERC-94-17.

TA7 W34m no.CERC-94-17

Contents

Preface	v
Conversion Factors, Non-SI to SI Units of Measurement	vi
1—Introduction	1
Background	1
Study Location	1
Modeling Approach	3
2—Numerical Model	7
3—Harbor Response to Wind Waves and Swell	10
4—Harbor Oscillations	17
5—Conclusions	20
References	22
Appendix A: HARBD Wave Amplification Factors, Wind Waves and Swell	A1
Appendix B: HARBD Wave Amplification Factors, Harbor Oscillations	B1

SF 298

List of Figures

Figure 1. Study location	2
Figure 2. Existing plan	4
Figure 3. Proposed Plan 6	5
Figure 4. Finite element grid for Plan 6	8
Figure 5. Boundary reflection coefficients for Plan 6	8
Figure 6. Output basin locations for Plan 6	11

Figure 7.	Percent occurrence of wave heights exceeding HQUSACE criteria, Plan 6	14
Figure 8.	Cumulative distribution of wave heights exceeding HQUSACE criterion in channel, Plan 6	16
Figure 9.	Oscillation pattern for Plan 6, 52.4-sec period (0.01910-Hz frequency)	18
Figure 10.	Oscillation pattern for Plan 6, 40.5-sec period (0.02470-Hz frequency)	19

List of Tables

Table 1.	Grid Size, Plan 6	7
Table 2.	Parameter Values Used in HARBD, Plan 6	9
Table 3.	Designation of Output Basin Areas, Plan 6	10
Table 4.	HARBD-SHALWV Wave Heights Exceeding HQUSACE Criteria, Plan 6	12
Table 5.	Percent Occurrence of Wave Height Versus Direction, Plan 6 - Wave Heights Exceeding 1 ft in Berthing Areas	13
Table 6.	Percent Occurrence of Wave Height Versus Direction, Plan 6 - Wave Heights Exceeding 2 ft in Channel	13
Table 7.	Summary of Percent Occurrence of Wave Heights	15

Preface

This study was authorized by the U.S. Army Engineer Division, Pacific Ocean (POD), and was conducted by personnel of the Coastal Oceanography Branch (COB), Research Division (RD), Coastal Engineering Research Center (CERC), of the U.S. Army Engineer Waterways Experiment Station (WES). The study was conducted during the period April through May 1994. Mr. Stanley Boc, POD, oversaw progress of the study.

This report was prepared by Dr. Edward F. Thompson, Hydraulic Engineer, COB; and Ms. Lori L. Hadley, Hydraulic Engineer, COB. The work was performed under the direct supervision of Dr. Martin C. Miller, Chief, COB, and Mr. H. Lee Butler, Chief, RD, and under the general supervision of Mr. Charles C. Calhoun, Jr., Assistant Director, CERC, and Dr. James R. Houston, Director, CERC.

At the time of publication of this report, Director of WES was Dr. Robert W. Whalin. Commander was COL Bruce K. Howard, EN.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

Conversion Factors, Non-SI to SI Units of Measurement

Non-SI units of measurement used in this report can be converted to SI units as follows:

Multiply	By	To Obtain
degrees (angle)	0.01745329	radians
feet	0.3048	meters
miles (U.S. statute)	1.6093	kilometers
nautical miles	1.852	kilometers

1 Introduction

Background

At the request of the U.S. Army Engineer Division, Pacific Ocean (POD), a numerical model wave response study of proposed improvement Plan 6 to Maalaea small boat harbor was conducted by the U.S. Army Engineer Waterways Experiment Station's (USAEWES) Coastal Engineering Research Center (CERC). The study was conducted as an extension of an earlier study to assess the wave response of various alternative modification plans for the harbor (Lillicrop et al. 1993). This report is focussed on the suggested alternative Plan 6 for modifying the existing harbor. Plan 6 was not considered in the earlier study. Information provided in the earlier report is referenced in this report but generally not repeated. Thus, for example, detailed descriptions of the existing harbor and the numerical model must be obtained from the report by Lillicrop et al. (1993).

Study Location

Maalaea small boat harbor is located on the southwest coast of the island of Maui, HI, the second largest island in the Hawaiian chain. The harbor is approximately 7 miles¹ south of the County seat in Wailuku and approximately 8 miles south of the commercial and business center of Kahului (Figure 1).

Harbor space on Maui is much in demand. Maalaea small boat harbor contains 93 berths. Wave energy penetrates inside the harbor sufficiently often and with enough energy that the harbor is regarded as having a "surge" problem. A larger, more protected small boat harbor at Maalaea would help satisfy the demand for tranquil berthing space.

¹ A table of factors for converting non-SI units of measurement to SI units is presented on page vi.

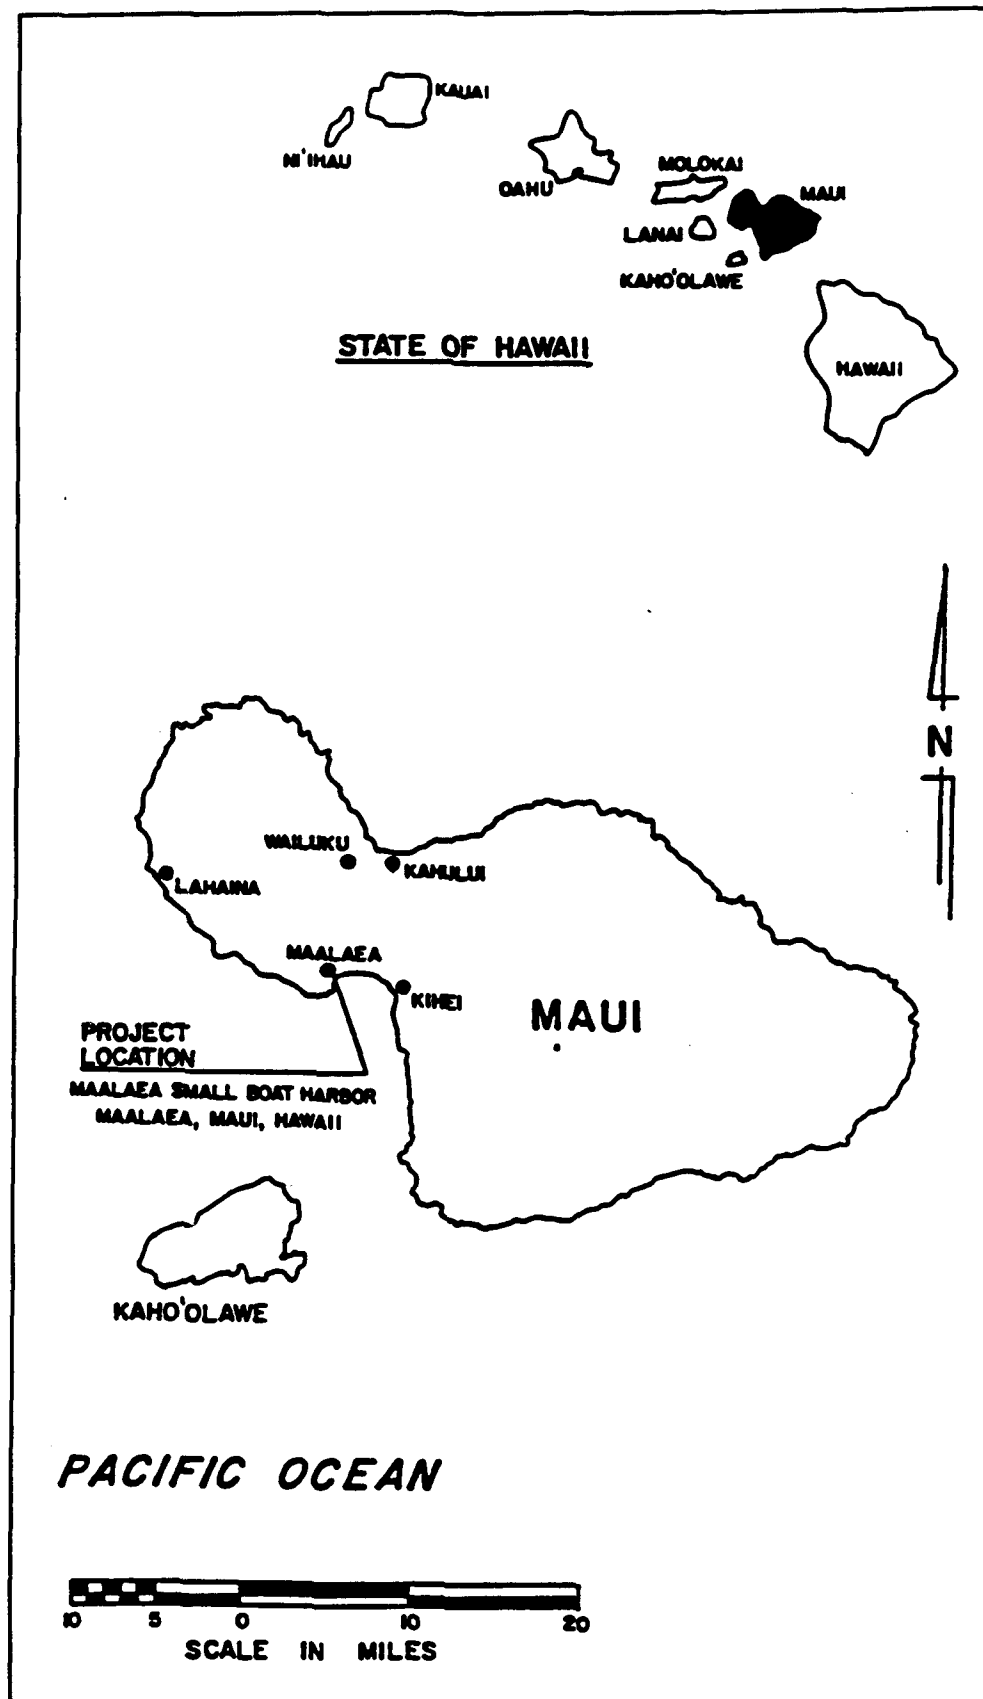


Figure 1. Study location

The shoreline of Maalaea Bay is part of an isthmus connecting two inactive volcanos which form west and east Maui. The shoreline is characterized by a long narrow coral-sand beach. The area is also known among surfers as the Maalaea Pipeline because of an infrequent, but world class breaking wave condition. Maalaea Harbor is located at the extreme west end of this beach. Several lesser surfing spots are also located near the harbor. There is concern that changes at Maalaea small boat harbor may impact nearby surfing areas.

The existing harbor configuration is shown in Figure 2. Plan 6 (Figure 3) would provide a more protected harbor area without new structures *exterior* to the existing harbor. Its disadvantages include lack of needed new mooring space and a possibly difficult entrance channel section confined between two rock-faced structures. Plan 6 includes the following improvements:

- a. Addition of a 95-ft-wide, 500-ft-long mole extending from the east end of the existing south breakwater into the harbor.
- b. A 610-ft-long entrance channel, varying in width from 150 to 200 ft, and varying in depth from 12 to 15 ft (not shown in Figure 3).
- c. A 570-ft-long interior revetment varying in width from 50 to 170 ft.

Study objectives of Headquarters, U.S. Army Corps of Engineers (HQUSACE) and POD were to test the proposed harbor design improvements against the criteria that wind wave and swell wave heights not exceed 1 ft in berthing areas and 2 ft in the entrance and access channels and turning basin more than approximately 10 percent of the time per year. Another objective was to assess the potential for harbor oscillations in Plan 6 relative to the existing harbor. To accomplish these objectives, the HARBD numerical harbor wave response model (Chen and Houston 1987) developed at CERC was used.

Modeling Approach

Both numerical and physical modeling were originally considered for study of alternative modifications to Maalaea small boat harbor. As discussed by Lillycrop et al. (1993), the numerical modeling approach was chosen to assess the variety of proposed alternatives. Assumptions inherent in the numerical modeling approach are as follows:

- a. No wave transmission or overtopping of structures.
- b. Structure crest elevations will not be tested or optimized.
- c. No wave-wave or wave-current interaction.

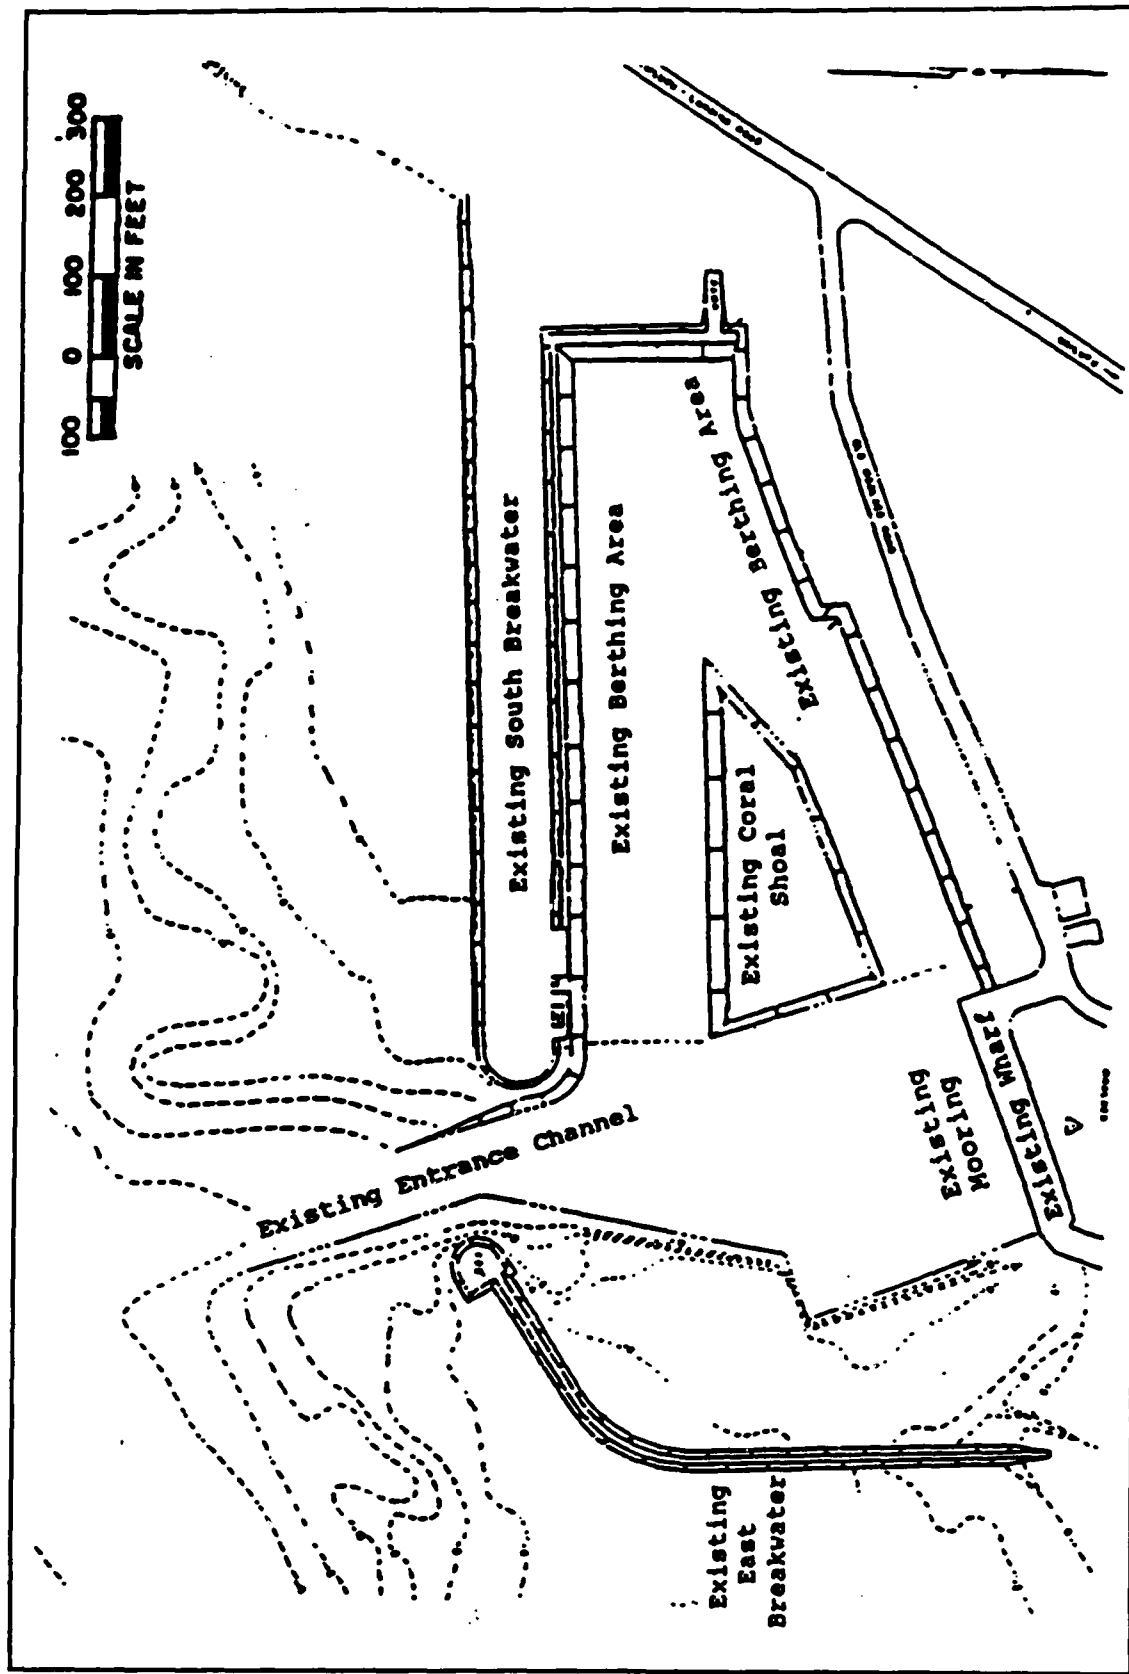


Figure 2. Existing plan

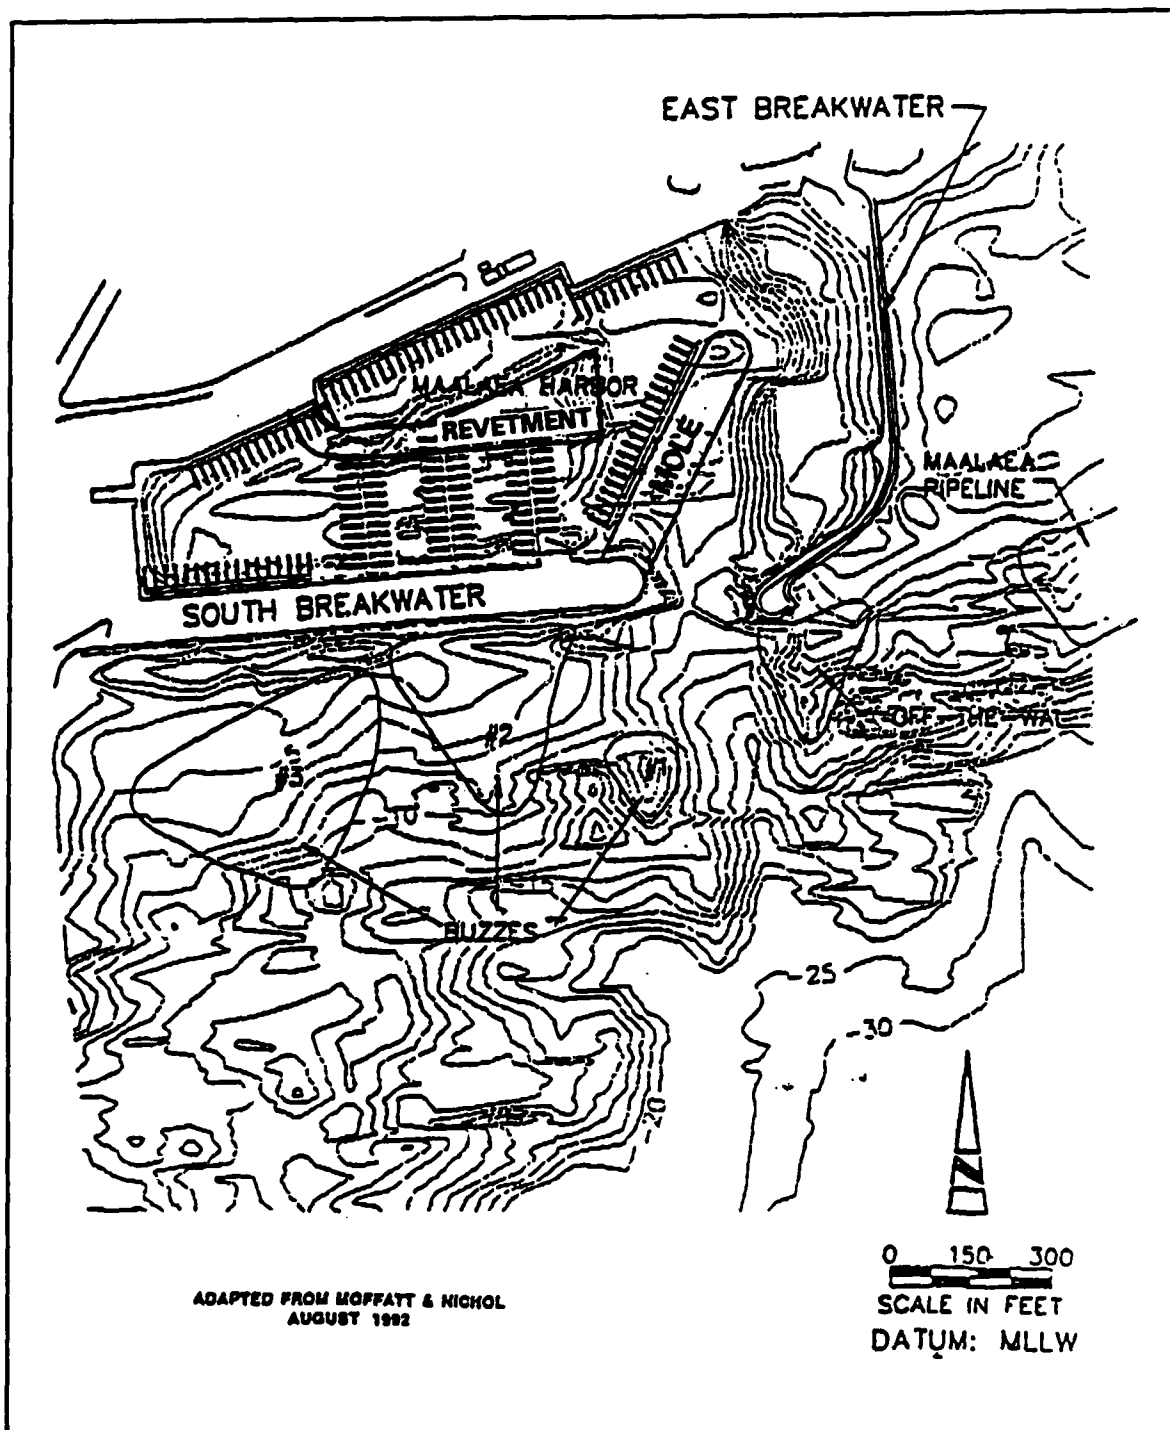


Figure 3. Proposed Plan 6

- d.* No wave breaking effects.
- e.* Diffraction around the structure ends is represented by diffraction around a blunt vertical wall with specified reflection coefficient.
- f.* Energy losses at constricted entrances are not explicitly included.

Within the limits of the assumptions, the numerical modeling approach can be expected to give a reasonable assessment of the proposed plans.

The procedures used to develop incident wind wave and swell information for the harbor response model are described by Lillycrop et al. (1993). The HARBD model and finite element grid used are briefly presented in Chapter 2. Results for wind waves and swell are given in Chapter 3. Harbor oscillation results for both the existing harbor and Plan 6 are given in Chapter 4. Conclusions are summarized in Chapter 5.

2 Numerical Model

The numerical model HARBD is a steady state hybrid element model (Chen and Houston 1987, Chen 1986, Lillycrop 1993). The model is described in the earlier report on Maalaea small boat harbor (Lillycrop et al. 1993). An overview of the model and its applications is also available in Thompson and Hadley (1994).

A finite element grid was developed to represent Plan 6 by modifying the grid used previously for the existing harbor (Figure 4). The new mole and interior revetted area were added and bathymetry was modified to give a 15-ft-deep entrance channel. The channel depth transitions to 12 ft near the existing wharf. Grid characteristics are summarized in Table 1. The grid manipulation software was developed by Turner and Baptista (1993).

Table 1 Grid Size, Plan 6	
Item	Size
Numer of Elements	6,747
Number of Nodes	3,603
Number of Solid Boundary Nodes	353
Number of Semicircle Boundary Nodes	105
Length of Typical Element, ft	20

Reflection coefficients along solid boundaries are the same as those used previously for the existing harbor for the boundaries common to both plans. Reflection coefficients along the new boundaries introduced in Plan 6 were estimated as 0.5 along the new mole and 0.35 along the interior revetment (Figure 5). Other parameter values used in the model are summarized in Table 2.

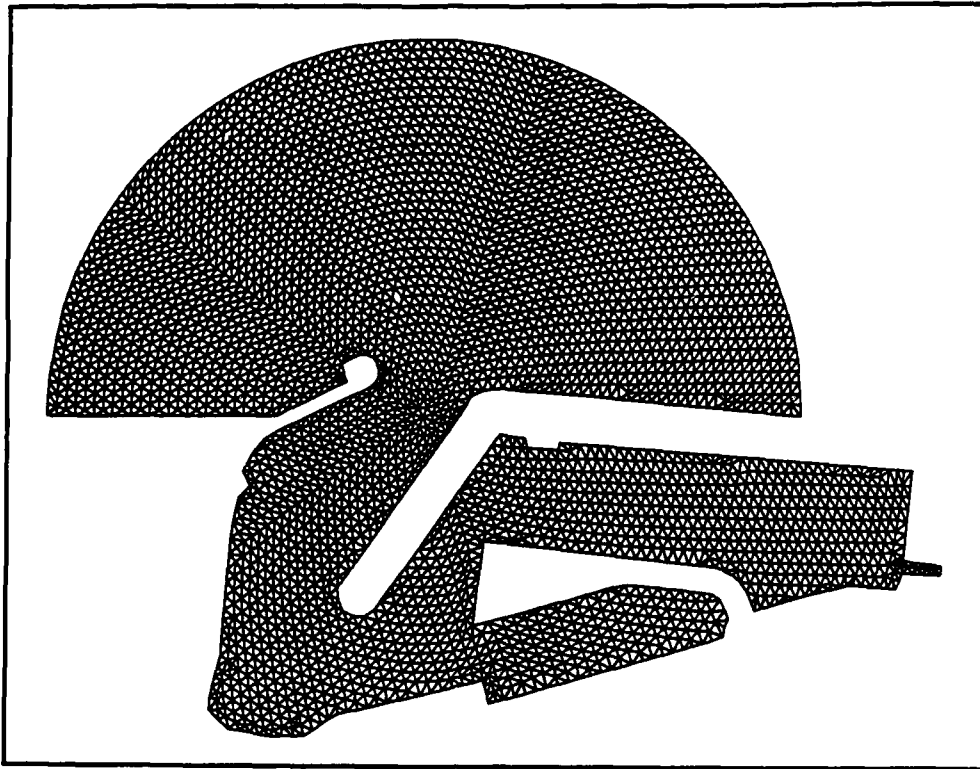


Figure 4. Finite element grid for Plan 6

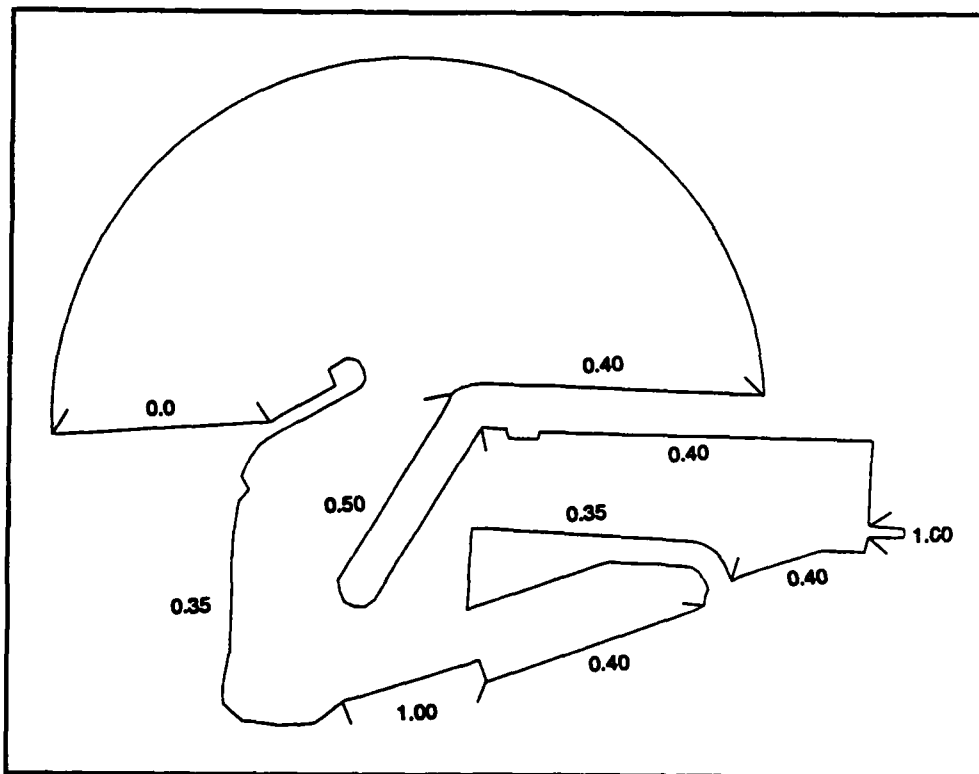


Figure 5. Boundary reflection coefficients for Plan 6

Table 2 Parameter Values Used in HARBD, Plan 6		
Parameter	Value	
	Wind Waves and Swell	Harbor Oscillations
Bottom friction, β	0.0	0.0
Coastline reflection, $K_{r,coast}$	0.1	1.0
Depth in infinite region, h_{∞}	25 ft	25 ft

Different parameters are used for the harbor oscillation tests. The reflection coefficient was set to 1.0 for all boundaries, since long waves generally reflect very well from a coastal boundary. Long waves are more affected by bottom friction than short waves, so a value of bottom friction β greater than zero is appropriate. However a default β of zero was used in these tests in which relative differences between the existing harbor and Plan 6 are the primary concern.

3 Harbor Response to Wind Waves and Swell

To establish the wave climate incident to Maalaea Harbor, a total of 187 deepwater wave height, period, and direction combinations were input to the SHALWV model (Lillycrop et al. 1993). The SHALWV grid extended beyond the island of Kahoolawe. It allowed estimates of sheltering and shallow-water effects on waves between the deepwater, open ocean south of Kahoolawe and the Maalaea Harbor area. To determine wave heights in Maalaea Harbor, the SHALWV wave heights near the harbor (in the vicinity of the seaward boundary of the HARBD grid) were multiplied with the HARBD amplification factors corresponding to each deepwater condition. The 187 wave height, period, and direction combinations were tested for Plan 6. All simulations were run on the WES CRAY Y-MP supercomputing facilities.

Output "basins" were selected for each plan tested to determine wave response throughout the harbor. A basin is a small cluster of elements over which the HARBD response is averaged to give a more representative output. Eighteen output basin locations were selected for Plan 6. The locations, selected by CERC and POD, are shown in Figure 6. Since the wave height criteria which must be satisfied are different for channel areas than for berthing areas, the basins are designated by area (Table 3). The HARBD amplification factors at these basins for each deepwater wave condition were saved and tabulated (Appendix A).

Table 3
Designation of Output Basin Areas,
Plan 6

Area	Basin Numbers
Channel	1-6
Berthing	7-18

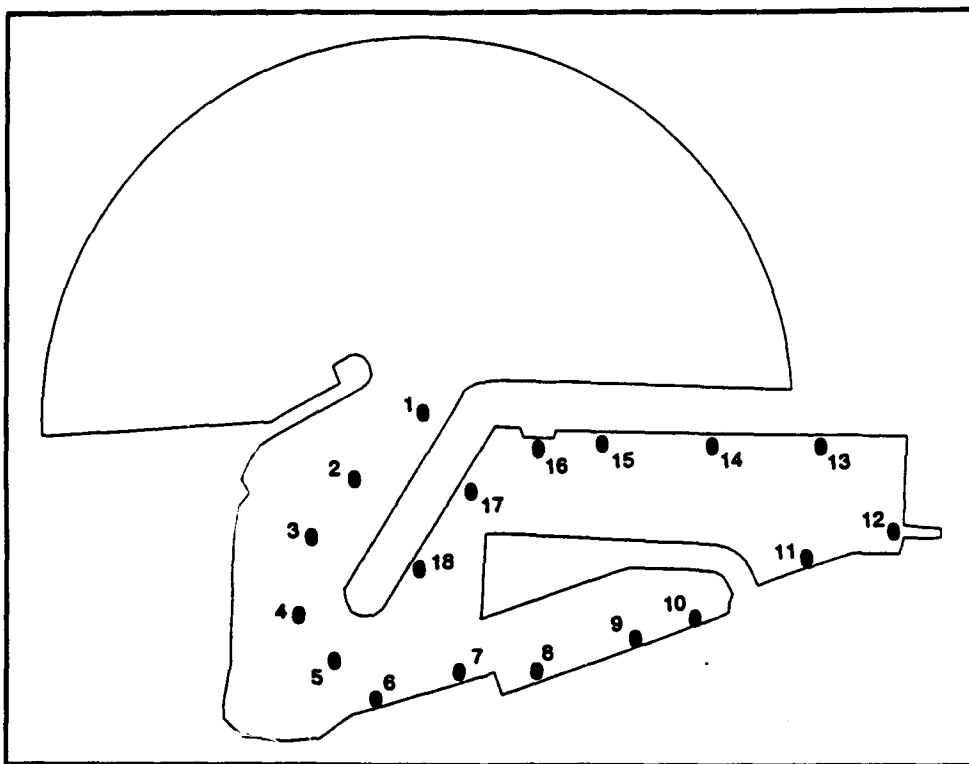


Figure 6. Output basin locations for Plan 6

The percent occurrence of wave heights exceeding 1 ft in the berthing areas and 2 ft in the entrance and access channels and turning basin were calculated for Plan 6. The procedure is identical to that used by Lillycrop et al. (1993).

Table 4 is a tabulation of the HARBD-SHALWV wave heights initially exceeding the HQUSACE criteria for each deepwater wave direction. The table shows that wave heights initially exceeding the maximum 1-ft criterion in berthing areas (basins 7 through 18) did not occur for deepwater incident wave heights of less than 9 ft. Wave heights exceeding the 2 ft maximum criterion in the entrance channel (basins 1-6) resulted from 9-, 13-, and 15-sec waves from the 225-deg direction and 17-sec waves from the 180-deg direction. These waves occurred at the harbor entrance in basin 1.

**Table 4
HARBD-SHALWV Wave Heights Exceeding HQUSACE Criteria,
Plan 6**

Deepwater Direction (deg az.)	Deepwater Period (sec)	Height (ft)	Deepwater Height (ft)	HARBD Amp. Factor	SHALWV Height (ft)	Basin Number
1-ft Criterion						
135.0	*					
157.5	*					
180.0	*					
202.5	*					
225.0	*					
247.5	*					
270.0	*					
2-ft Criterion						
135.0	*					
157.5	*					
180.0	17	2.04	3.8	1.22	1.68	1
202.5	*					
225.0	9 13 15	2.01 2.31 2.02	4.7 7.0 6.9	1.27 1.13 1.07	1.58 2.04 1.89	1 1 1
247.5	*					
270.0	*					
*Deepwater wave heights between 1-9 ft do not exceed HQUSACE criteria for this condition.						

The percent occurrence of wave heights exceeding the maximum 1-ft and 2-ft criteria was calculated using the percent occurrence tables of deepwater conditions and HARBD-SHALWV wave height results. These results are given in Tables 5 and 6 and illustrated in Figure 7. Although wave breaking was not taken into account in the tables, the higher wave heights may break over the reef, thus reducing wave heights in the harbor. In evaluating the percent occurrence results, it is apparent that waves approaching from the southeast (135.0- and 157.0-deg) directions are insignificant in comparison to waves approaching from south to west (180.0- to 270.0-deg) directions.

The percentage of wave heights exceeding the maximum 1-ft and 2-ft criteria for the existing condition and Plans 1, 2, 3, 1a, 1b, and 6 are summarized in Table 7 along with the HQUSACE criteria. These values are somewhat conservative since they represent basins with the largest wave

Table 5
Percent Occurrence of Wave Height Versus Direction, Plan 6 -
Wave Heights Exceeding 1 ft in Berthing Areas

Deepwater Wave Height, ft	Deepwater Wave Direction (deg azimuth)							Total
	135.0	157.5	180.0	202.5	225.0	247.5	270.0	
3.01-4.00								0.00
4.01-5.00								0.00
5.01-6.00								0.00
6.01-7.00								0.00
7.01-8.00								0.00
8.01-9.00								0.00
9.01+						1.25	0.65	1.90
TOTAL	0.00	0.00	0.00	0.00	0.00	1.25	0.65	1.90

Table 6
Percent Occurrence of Wave Height Versus Direction, Plan 6 -
Wave Heights Exceeding 2 ft in Channel

Deepwater Wave Height, ft	Deepwater Wave Direction (deg azimuth)							Total
	135.0	157.5	180.0	202.5	225.0	247.5	270.0	
3.01-4.00			0.05					0.05
4.01-5.00					0.36			0.36
5.01-6.00			0.02		0.49			0.51
6.01-7.00					0.57			0.57
7.01-8.00			0.01		2.25			2.26
8.01-9.00					1.88			1.88
9.01+						1.25	0.65	1.90
TOTAL	0.00	0.00	0.08	0.00	5.54	1.25	0.65	7.52

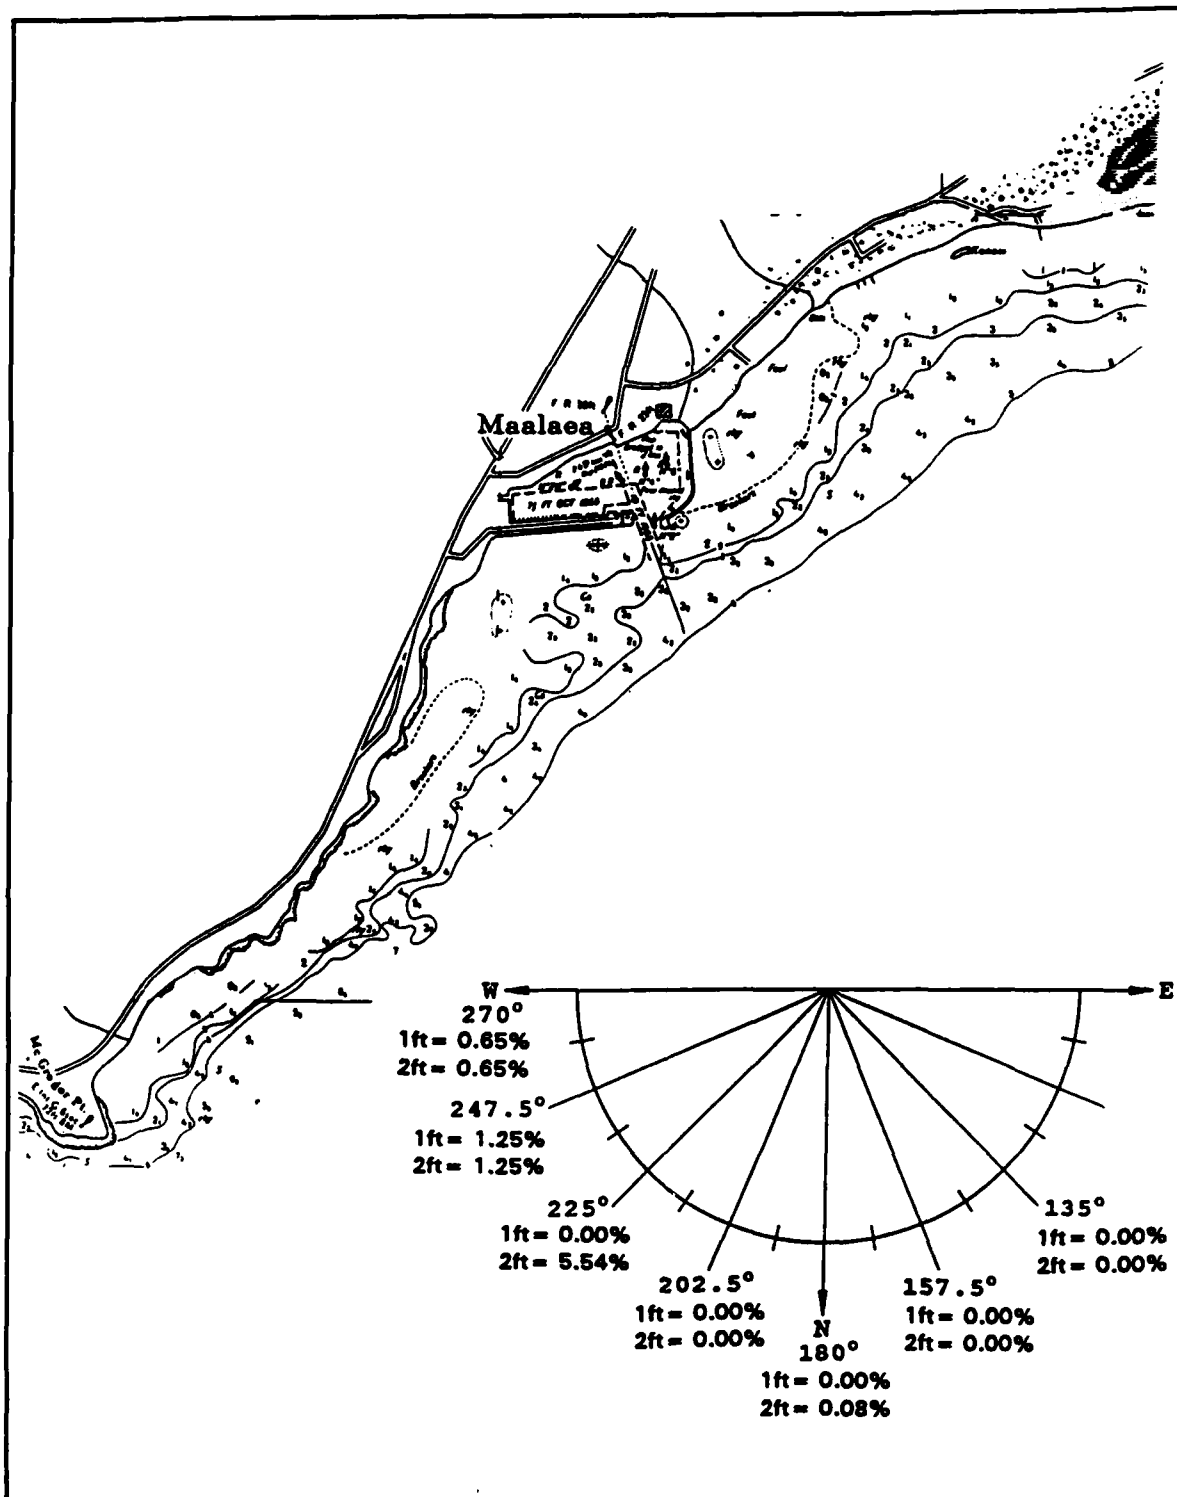


Figure 7. Percent occurrence of wave heights exceeding HQUSACE criteria, Plan 6

heights occurring in the harbor for each deepwater wave condition. Plan 6 satisfies the HQUSACE criteria for providing adequate protection in the channel and berthing areas.

Table 7 Summary of Percent Occurrence of Wave Heights								
Location	Percent of Time Criterion is Exceeded							
	HQUSACE Criterion	Existing	Plan 1	Plan 2	Plan 3	Plan 1a	Plan 1b	Plan 6
Berthing areas (1 ft criterion)	< 10.0	21.4	6.1	17.7	2.0	10.0	18.9	1.9
Entrance Channel (2-ft criterion)	< 10.0	9.6	2.0	11.3	2.0	5.0	4.9	7.5

Although Plan 6 is acceptable relative to the usual protection criteria, it may result in unusually hazardous navigation conditions in the confined portion of the channel located between the east breakwater and the proposed new mole. Table 7 indicates the likelihood of encountering wave heights in the channel which exceed the HQUSACE threshold criterion. More detailed information about the distribution of wave height conditions above the threshold in Plan 6 is given in Figure 8. For example, the figure indicates that one percent of the time wave heights at some point in the channel will exceed about 3.3 ft. These conditions are characteristic of output basin 1. More protected areas would generally experience lower wave conditions.

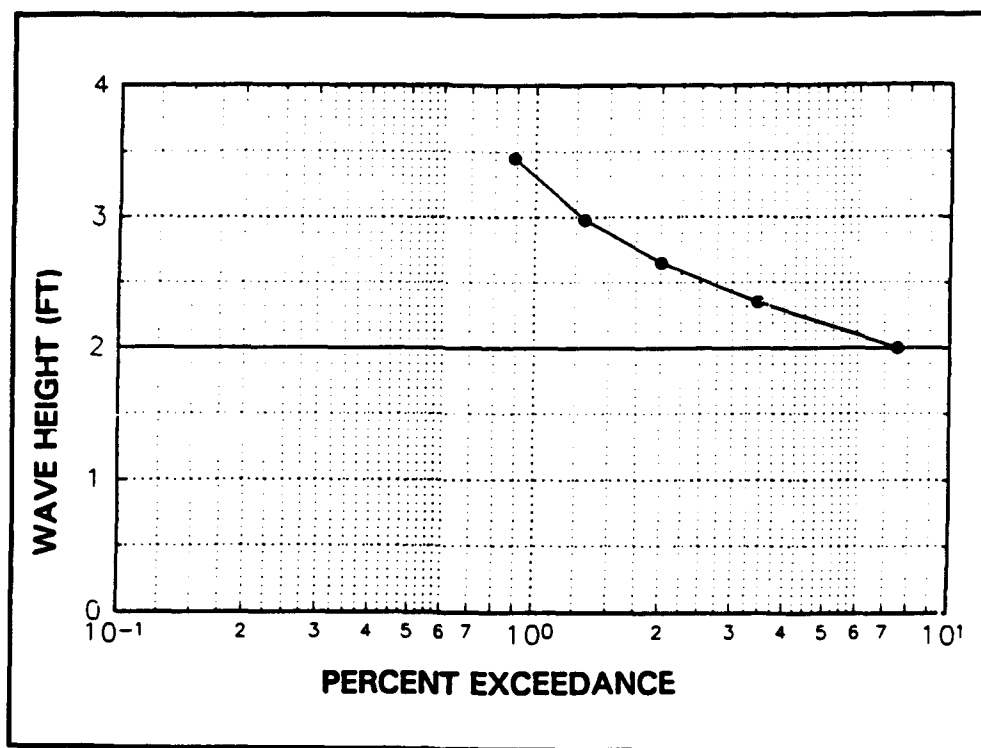


Figure 8. Cumulative distribution of wave heights exceeding HQUSACE criterion in channel, Plan 6

4 Harbor Oscillations

The HARBD numerical model was run for both Plan 6 and the existing plan to investigate the harbor response to wave periods characteristic of harbor oscillations. These tests were included because the "surge" problem reported in the existing harbor may arise in part from a resonant response to long-period wave energy impacting the harbor. Harbor oscillations were not considered in the earlier study by Lillycrop et al. (1993).

Incident long wave conditions consisted of wave periods ranging from 20 sec to 180 sec approaching the harbor from directly offshore (central approach direction relative to the HARBD seaward boundary). The increment between successive periods tested, based on frequency, was 0.00020 Hz for the shorter periods to 0.00007 Hz for most of the longer periods.

Amplification factors for Plan 6 and the existing harbor plan are shown by basin in Appendix B. It is important to note that the basin numbers in Appendix B for the existing harbor match the locations shown in Figure 6. Coincident basin locations for the existing harbor and Plan 6 allowed a more straightforward comparison of oscillation characteristics of the two harbor configurations.

Relative to harbor oscillations, the principal difference between Plan 6 and the existing harbor appears to be the addition of new "corner" areas in Plan 6. The corner just west of basin 10 and the corner between basins 16 and 17 both appear to act as antinodes for a number of different resonant oscillation modes, as evidenced by the high amplification factor peaks in Appendix B. Figure 9 shows the oscillation pattern for one Plan 6 resonant mode causing a strong response at basins 12, 14, 16, and 17. Similarly, Figure 10 shows a case with strong response at basins 8 and 10. Both of the potentially troublesome new corner areas may be desired for berthing facilities. Basin 12, which is an active antinode in the existing harbor, appears to be comparably active in Plan 6, though the resonant frequencies are different.

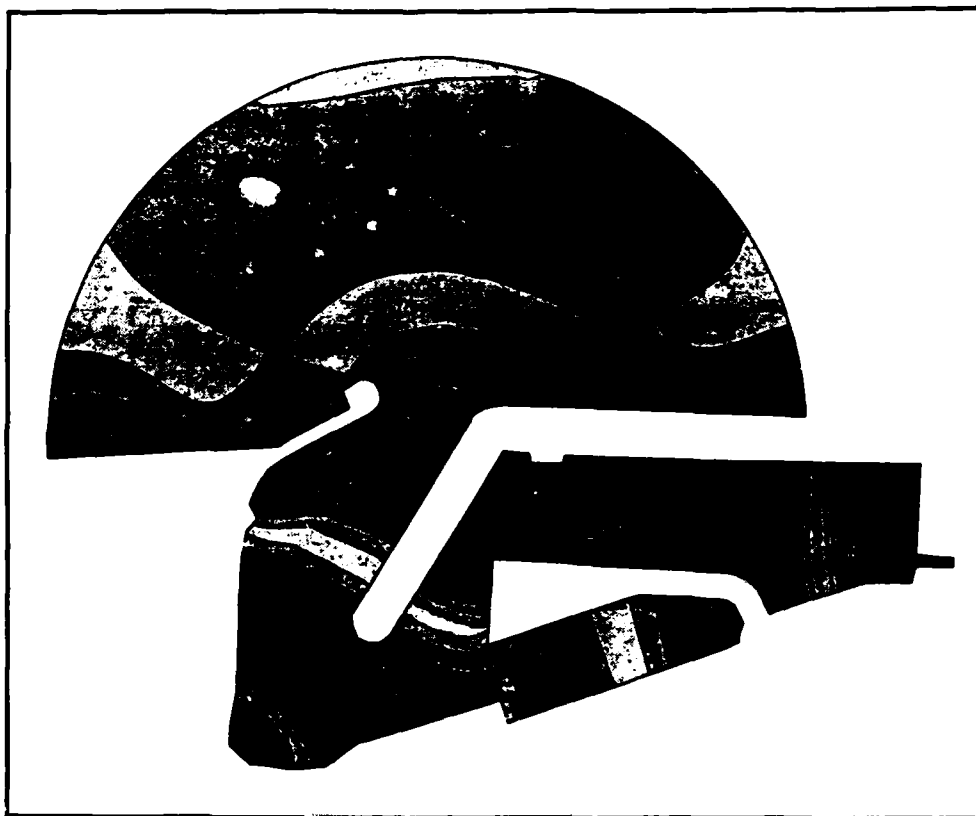


Figure 9. Oscillation pattern for Plan 6, 52.4-sec period (0.01910-Hz frequency); darker areas indicate higher amplification

The amplification factors shown in Appendix B should be viewed as conservatively high for several reasons. The wave reflection coefficient at all solid boundaries was taken as 1.0. Energy losses through a constricted entrance are not explicitly included in the HARBD model (Thompson et al. 1993). Finally, the east breakwater is represented as a solid barrier; but for harbor oscillation wave periods, significant energy may be transmitted through it.

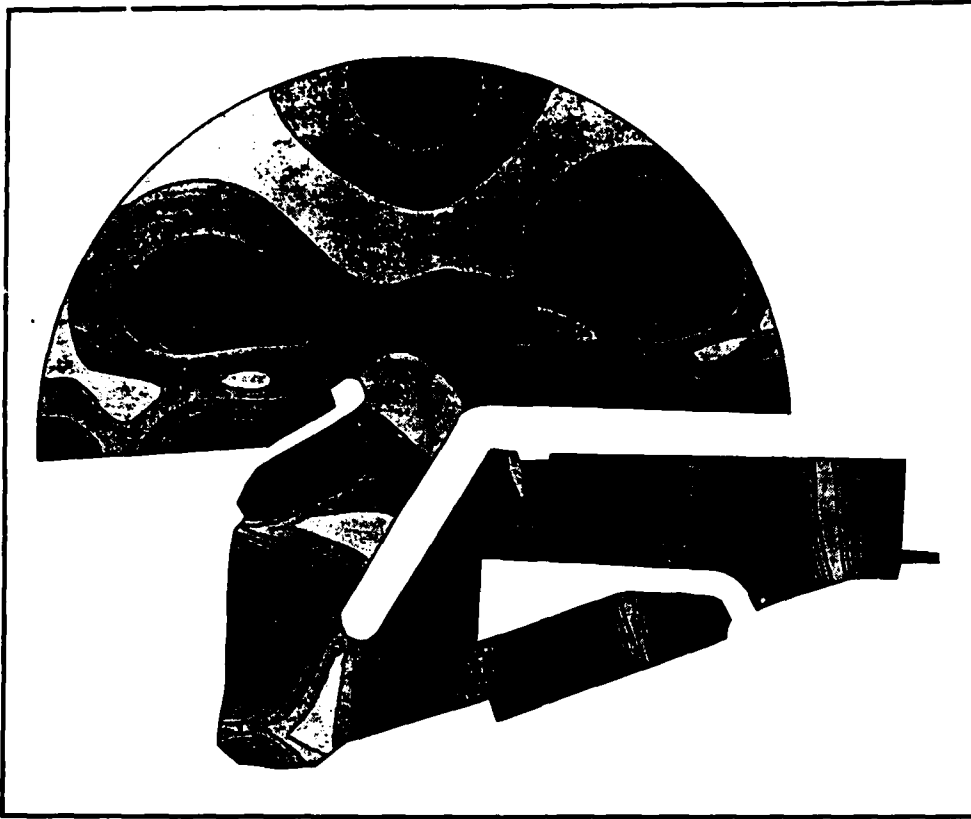


Figure 10. Oscillation pattern for Plan 6, 40.5-sec period (0.02470-Hz frequency); darker areas indicate higher amplification

5 Conclusions

The numerical model studies and results described in this report should be seen in light of the following considerations:

- a. Deepwater wave estimates are based on measurements in the Monitoring of Completed Coastal Projects Program collected at Barbers Point, Oahu. Availability of incident wave data at the Maalaea Harbor vicinity would significantly improve the validity of the overall results.
- b. Reflection coefficients were estimated as described by Lillycrop et al. (1993). Research in this area continues at CERC for better guidance.
- c. The following assumptions were made in the implementation of the HARBD numerical model used in this study. The model does not consider wave transmission through the breakwater, overtopping of structures, and wave breaking effects in the entrance channel; structure crest elevations were not tested or optimized; currents and nonlinear effects were neglected; and diffraction around the structure ends was represented by diffraction around a blunt vertical wall with specified reflection coefficients. If wave transmission through the breakwater and overtopping of structures did occur in the harbor, the increased energy could result in larger wave heights than predicted. The presence of wave currents and breaking would increase hazardous navigation; however, wave breaking would reduce the energy in the harbor and result in lower wave heights than predicted. The primary effects which must be considered within a harbor such as Maalaea are wave refraction, diffraction, and dissipation effects for which the model has been well verified.
- d. Energy losses for long-period (harbor oscillation) waves passing through a constricted entrance were not explicitly modeled.
- e. The HARBD model uses monochromatic waves only.

Based on the results of this study, the following conclusions were reached:

- a. Plan 6 is satisfactory in providing the harbor with adequate protection from the incident wind wave and swell climate.**
- b. Navigation during high wave conditions is potentially more hazardous in Plan 6 relative to other plans because much of the entrance channel is confined between two rock-faced structures.**
- c. Plan 6 can potentially lead to a significant increase in the amplitude of harbor oscillations by:**
 - (1) Creating more confined corners (which can act as antinodes) in desired berthing areas.**
 - (2) Creating a new solid, impermeable, eastern boundary for the harbor basin. In the existing harbor, the permeable east breakwater serves as the eastern boundary of the harbor basin.**

References

- Chen, H. S. (1986). "Effects of bottom friction and boundary absorption on water wave scattering," *Applied Ocean Research* 8 (2), 99-104.
- Chen, H. S., and Houston, J. R. (1987). "Calculation of water oscillation in coastal harbors: HARBS and HARBD user's manual," Instruction Report CERC-87-2, U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS.
- Lillycrop, L. S. (1993). "Harbor wave oscillation model (HARBD) theory and program documentation," Chapter 9 in: Cialone, M. A., Mark, D. J., Chou, L. C., Leenknecht, D. A., Davis, J. E., Lillycrop, L. S., Jensen, R. E., Thompson, E. F., Gravens, M. B., Rosati, J. D., Wise, R. A., Kraus, N. C., and Larson, P. M. (1993). "Coastal modeling system (CMS) user's manual," Instruction Report CERC-91-1, Supplement 2, U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS.
- Lillycrop, L. S., Bratos, S. M., Thompson, E. F., and Rivers, P. (1993). "Wave response of proposed improvements to the small boat harbor at Maalaea, Maui, Hawaii," Miscellaneous Paper CERC-93-4, U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS.
- Thompson, E. F., and Hadley, L. L. (1994). "Numerical modeling of harbor response to waves," *Journal of Coastal Research* (in publication).
- Thompson, E. F., Chen, H. S., and Hadley, L. L. (1993). "Numerical modeling of waves in harbors." *Proceedings, Ocean Wave Measurement and Analysis*. American Society of Civil Engineers, 590-601.
- Turner, P. J., and Baptista, A. M. (1993). "ACE/gredit user's manual," Center for Coastal and Land-Margin Research, Oregon Graduate Institute of Science and Technology, Beaverton, OR.

Appendix A

HARBD Wave Amplification Factors, Wind Waves and Swell

Table A1
HARBD Wave Amplification Factors
Plan 6, Deepwater Wave Direction = 135.0 deg

Basin	Deepwater Wave Period, sec					
	9	11	13	15	17	20
1	1.30	0.94	0.51	1.26	0.15	1.07
2	0.98	0.65	0.45	0.71	0.12	0.63
3	0.60	0.35	0.35	0.43	0.07	0.55
4	0.56	0.47	0.22	0.30	0.04	0.23
5	0.34	0.38	0.18	0.14	0.01	0.07
6	0.28	0.22	0.15	0.17	0.01	0.11
7	0.09	0.12	0.16	0.19	0.02	0.01
8	0.10	0.05	0.07	0.10	0.01	0.02
9	0.04	0.04	0.05	0.07	0.01	0.01
10	0.02	0.03	0.03	0.04	*	0.01
11	*	*	*	*	*	*
12	*	*	*	*	*	*
13	*	*	0.01	0.01	*	0.01
14	0.01	0.01	0.02	0.01	*	0.01
15	0.01	0.02	0.02	0.02	*	0.01
16	0.01	0.02	0.03	0.02	*	0.02
17	0.08	0.07	0.12	0.11	0.01	0.04
18	0.08	0.07	0.12	0.11	0.01	0.04
*Wave amplification factor is below significance for tabulation.						

Table A2
HARBD Wave Amplification Factors
Plan 6, Deepwater Wave Direction = 157.5 deg

Basin	Deepwater Wave Period, sec					
	9	11	13	15	17	20
1	0.27	1.06	0.44	1.35	0.76	1.00
2	0.50	0.68	0.40	0.68	0.43	0.57
3	0.25	0.37	0.33	0.44	0.28	0.40
4	0.24	0.52	0.20	0.30	0.18	0.21
5	0.16	0.40	0.16	0.16	0.06	0.04
6	0.13	0.25	0.12	0.18	0.07	0.05
7	0.03	0.14	0.13	0.19	0.11	0.07
8	0.04	0.06	0.06	0.10	0.06	0.05
9	0.02	0.04	0.04	0.06	0.04	0.02
10	0.01	0.03	0.03	0.04	0.02	0.01
11	*	*	*	*	*	*
12	*	*	*	*	*	*
13	*	0.01	0.01	0.01	*	*
14	*	0.02	0.01	0.01	*	0.01
15	*	0.03	0.02	0.02	*	0.01
16	0.01	0.04	0.03	0.03	*	0.01
17	0.04	0.09	0.10	0.12	0.04	0.03
18	0.04	0.09	0.10	0.12	0.04	0.03

*Wave amplification factor is below significance for tabulation.

Table A3
HARBD Wave Amplification Factors
Plan 6, Deepwater Wave Direction = 180.0 deg

Basin	Deepwater Wave Period, sec					
	9	11	13	15	17	20
1	0.36	0.42	0.14	1.02	1.22	0.20
2	0.11	0.30	0.15	0.53	0.60	0.12
3	0.08	0.22	0.10	0.37	0.39	0.08
4	0.08	0.18	0.08	0.25	0.28	0.04
5	0.06	0.14	0.06	0.16	0.13	0.01
6	0.03	0.09	0.05	0.16	0.15	0.01
7	0.01	0.07	0.05	0.17	0.18	0.02
8	0.01	0.03	0.03	0.08	0.10	0.01
9	0.01	0.02	0.02	0.05	0.06	0.01
10	*	0.01	0.01	0.03	0.03	*
11	*	*	*	*	*	*
12	*	*	*	*	*	*
13	*	*	*	0.01	0.01	*
14	*	0.01	0.01	0.01	0.01	*
15	*	0.01	0.01	0.02	0.02	*
16	*	0.02	0.01	0.03	0.02	*
17	0.01	0.04	0.04	0.11	0.10	0.01
18	0.01	0.04	0.04	0.11	0.10	0.01
*Wave amplification factor is below significance for tabulation.						

Table A4
HARBD Wave Amplification Factors
Plan 6, Deepwater Wave Direction = 202.5 deg

Basin	Deepwater Wave Period, sec					
	9	11	13	15	17	20
1	0.35	0.68	0.61	0.60	1.12	0.32
2	0.15	0.48	0.27	0.39	0.48	0.21
3	0.06	0.41	0.23	0.25	0.33	0.13
4	0.08	0.36	0.09	0.18	0.23	0.08
5	0.08	0.28	0.04	0.13	0.11	0.02
6	0.06	0.18	0.03	0.13	0.13	0.01
7	0.03	0.17	0.04	0.13	0.15	0.03
8	0.01	0.08	0.02	0.06	0.08	0.02
9	0.01	0.05	0.01	0.04	0.05	0.01
10	0.01	0.03	0.01	0.02	0.03	0.01
11	*	*	*	*	*	*
12	*	*	*	*	*	*
13	*	0.01	*	0.01	*	*
14	*	0.02	*	0.01	0.01	*
15	*	0.03	0.01	0.02	0.01	*
16	0.01	0.04	0.01	0.02	0.02	*
17	0.02	0.11	0.03	0.09	0.08	0.01
18	0.02	0.11	0.03	0.09	0.08	0.01
*Wave amplification factor is below significance for tabulation.						

Table A5
HARBD Wave Amplification Factors
Plan 6, Deepwater Wave Direction = 225.0 deg

Basin	Deepwater Wave Period, sec					
	9	11	13	15	17	20
1	1.27	0.72	0.89	1.07	0.95	0.91
2	0.27	0.27	0.44	0.42	0.44	0.47
3	0.23	0.27	0.41	0.39	0.29	0.42
4	0.35	0.23	0.21	0.20	0.21	0.18
5	0.30	0.19	0.15	0.14	0.10	0.05
6	0.19	0.12	0.13	0.12	0.11	0.08
7	0.05	0.12	0.14	0.13	0.13	0.01
8	0.03	0.05	0.07	0.06	0.07	0.01
9	0.03	0.03	0.04	0.04	0.04	0.01
10	0.02	0.02	0.03	0.03	0.03	*
11	*	*	*	*	*	*
12	*	*	*	*	*	*
13	*	0.01	0.01	0.01	*	*
14	*	0.01	0.01	0.01	0.01	0.01
15	0.01	0.02	0.02	0.02	0.01	0.01
16	0.01	0.03	0.03	0.02	0.01	0.01
17	0.04	0.07	0.10	0.09	0.07	0.03
18	0.04	0.07	0.10	0.09	0.07	0.03
*Wave amplification factor is below significance for tabulation.						

Table A6
HARBD Wave Amplification Factors
Plan 6, Deepwater Wave Direction = 247.5 deg

Basin	Deepwater Wave Period, sec					
	9	11	13	15	17	20
1	1.02	0.70	1.15	0.76	0.81	0.96
2	0.42	0.45	0.46	0.37	0.40	0.51
3	0.26	0.39	0.42	0.25	0.26	0.45
4	0.39	0.26	0.22	0.18	0.15	0.19
5	0.31	0.21	0.16	0.08	0.03	0.05
6	0.18	0.15	0.14	0.10	0.02	0.09
7	0.09	0.16	0.15	0.11	0.07	0.01
8	0.04	0.08	0.07	0.06	0.05	0.01
9	0.03	0.05	0.05	0.04	0.02	0.01
10	0.02	0.03	0.03	0.02	0.01	*
11	*	*	*	*	*	*
12	*	*	*	*	*	*
13	*	0.01	0.01	*	*	*
14	0.01	0.02	0.01	0.01	*	0.01
15	0.01	0.03	0.02	0.01	*	0.01
16	0.01	0.04	0.03	0.01	*	0.01
17	0.05	0.11	0.10	0.06	0.02	0.03
18	0.05	0.11	0.10	0.06	0.02	0.03

*Wave amplification factor is below significance for tabulation.

Table A7
HARBD Wave Amplification Factors
Plan 6, Deepwater Wave Direction = 270.0 deg

Basin	Deepwater Wave Period, sec					
	9	11	13	15	17	20
1	1.07	0.88	1.15	0.76	0.81	0.96
2	0.42	0.49	0.46	0.37	0.40	0.52
3	0.26	0.44	0.42	0.25	0.26	0.46
4	0.29	0.28	0.22	0.18	0.15	0.19
5	0.22	0.24	0.16	0.08	0.03	0.05
6	0.18	0.18	0.13	0.10	0.02	0.09
7	0.08	0.19	0.15	0.11	0.07	0.01
8	0.04	0.09	0.07	0.06	0.05	0.01
9	0.03	0.06	0.05	0.04	0.02	0.01
10	0.02	0.04	0.03	0.02	0.01	*
11	*	*	*	*	*	*
12	*	*	*	*	*	*
13	*	0.01	0.01	*	*	*
14	0.01	0.02	0.01	0.01	*	0.01
15	0.01	0.03	0.02	0.01	*	0.01
16	0.01	0.04	0.03	0.01	*	0.01
17	0.05	0.14	0.10	0.06	0.02	0.03
18	0.05	0.14	0.10	0.06	0.02	0.03

*Wave amplification factor is below significance for tabulation.

Appendix B

HARBD Wave Amplification Factors, Harbor Oscillations

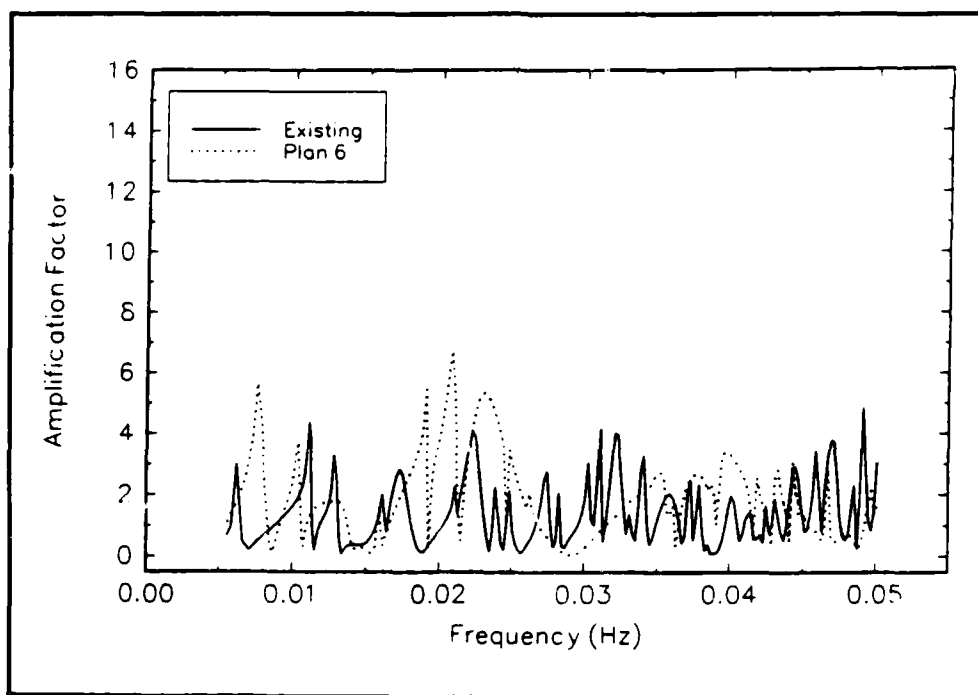


Figure B1. Wave amplification factor, basin 1

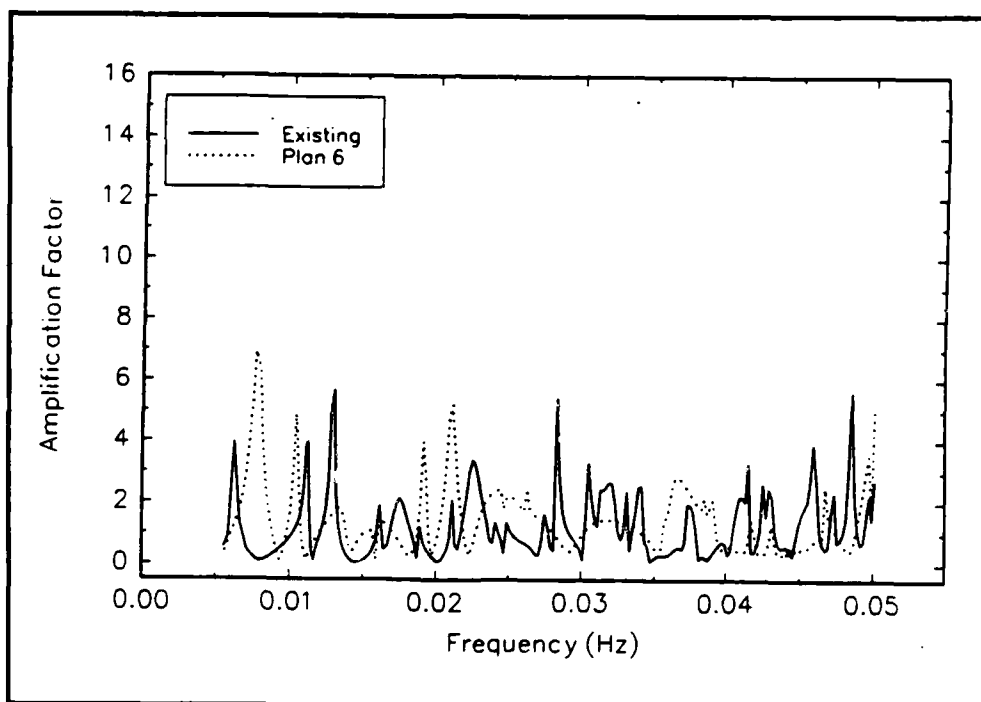


Figure B2. Wave amplification factor, basin 2

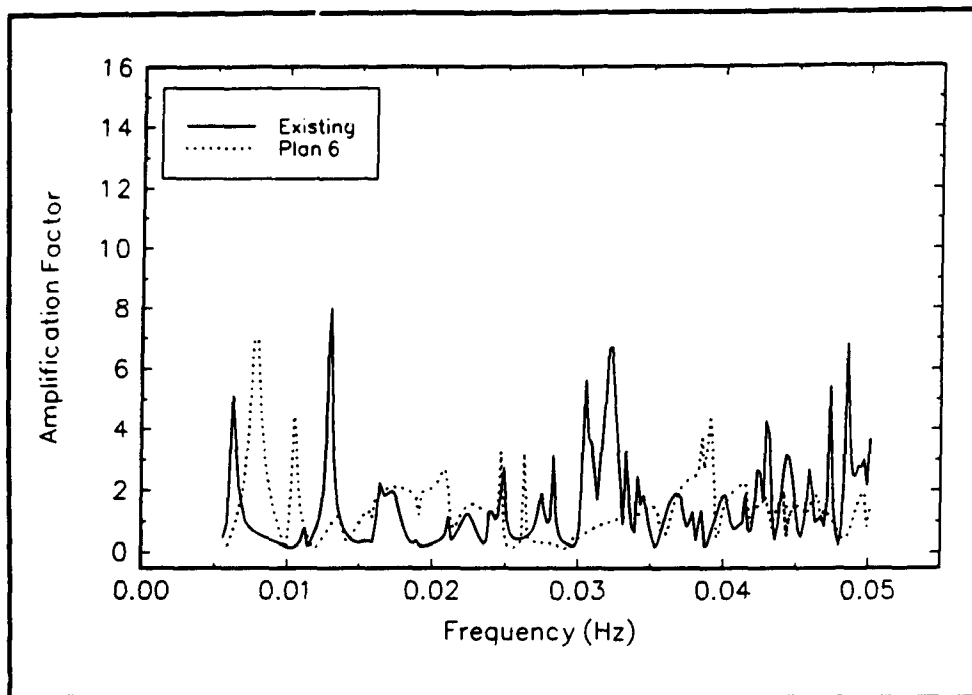


Figure B3. Wave amplification factor, basin 3

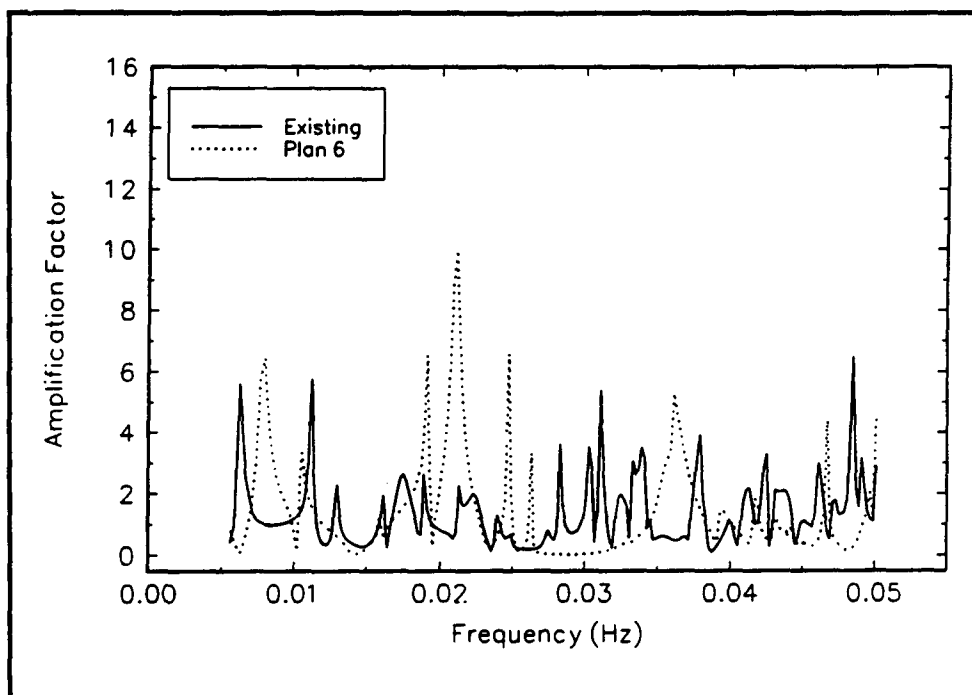


Figure B4. Wave amplification factor, basin 4

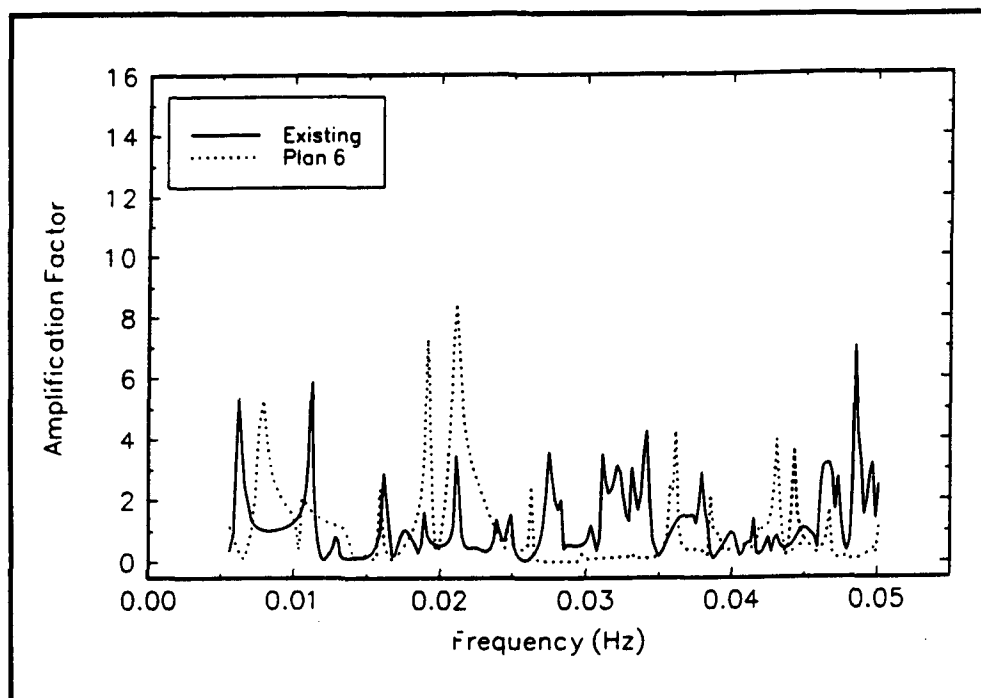


Figure B5. Wave amplification factor, basin 5

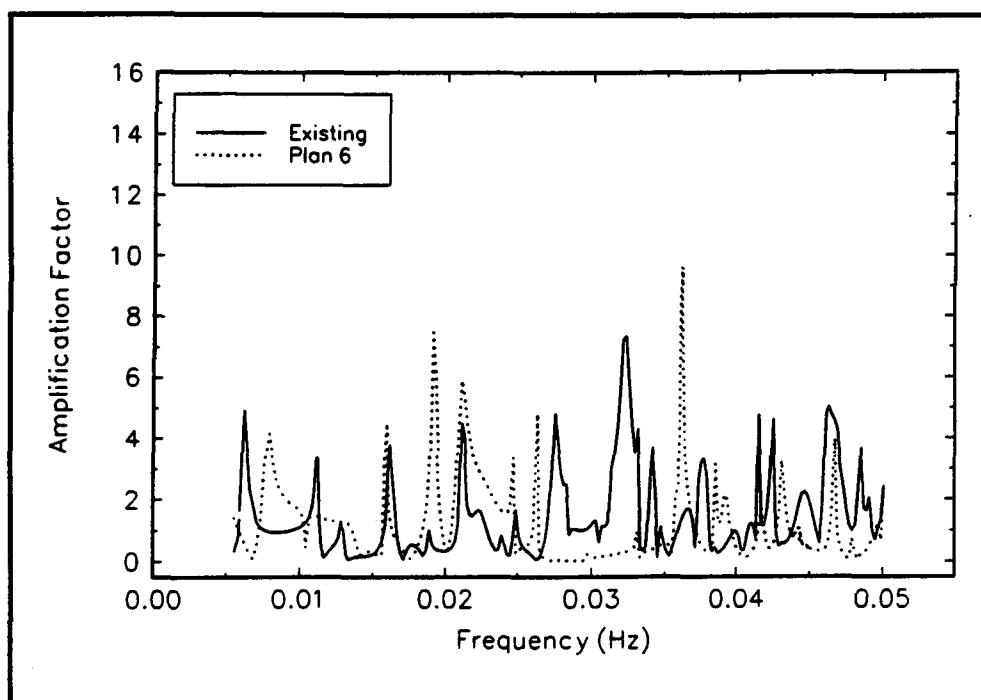


Figure B6. Wave amplification factor, basin 6

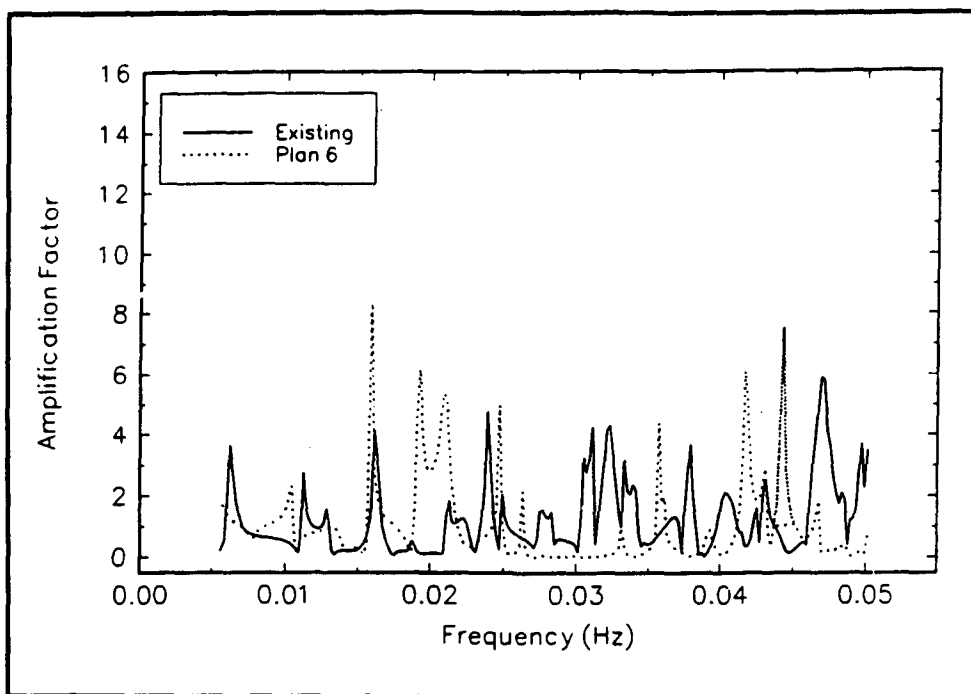


Figure B7. Wave amplification factor, basin 7

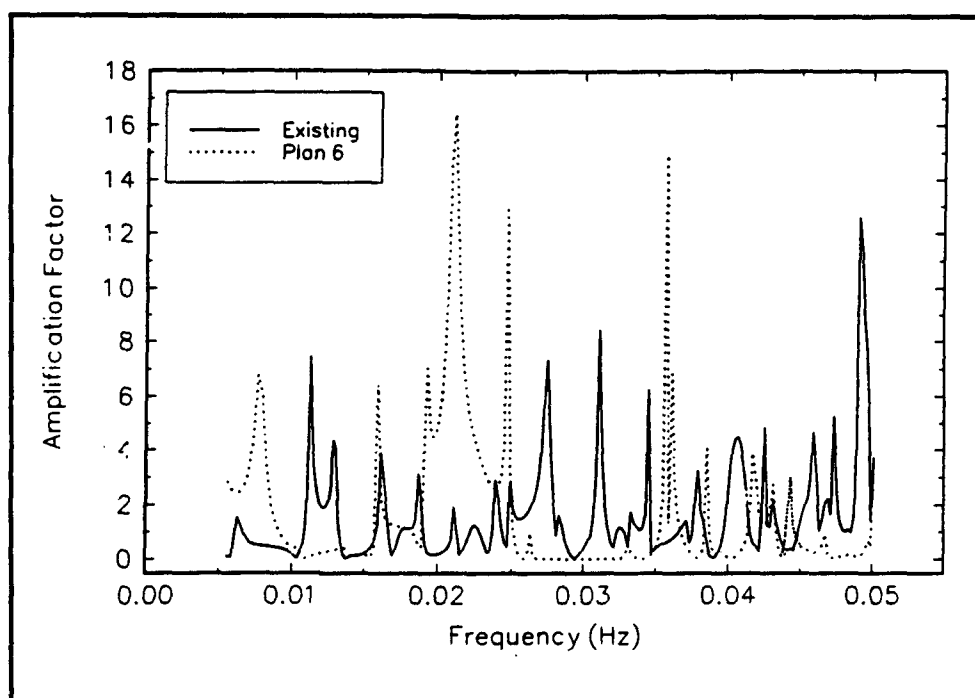


Figure B8. Wave amplification factor, basin 8

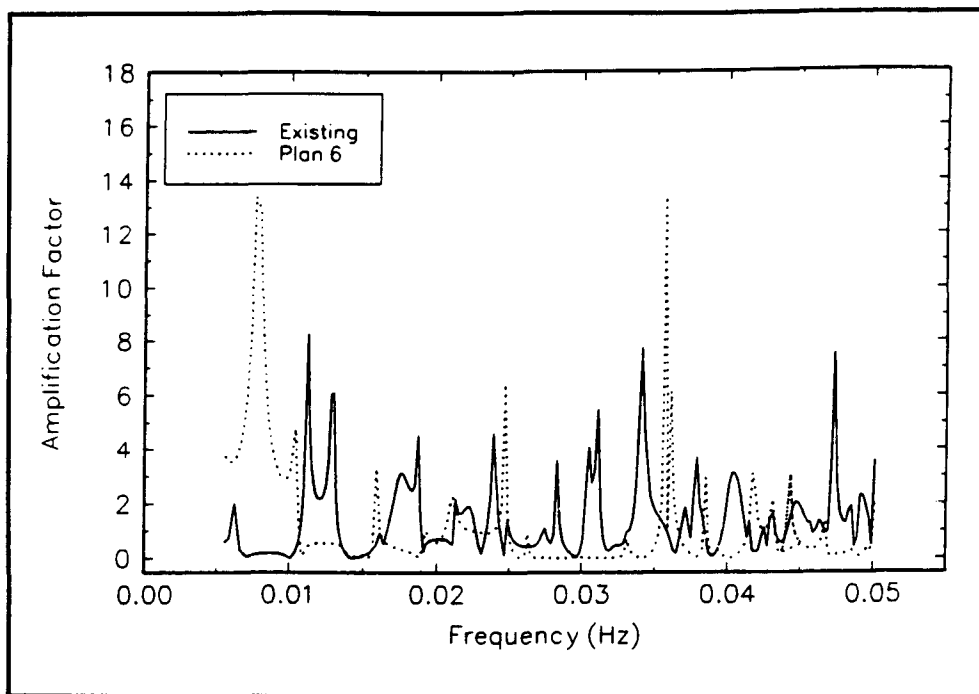


Figure B9. Wave amplification factor, basin 9

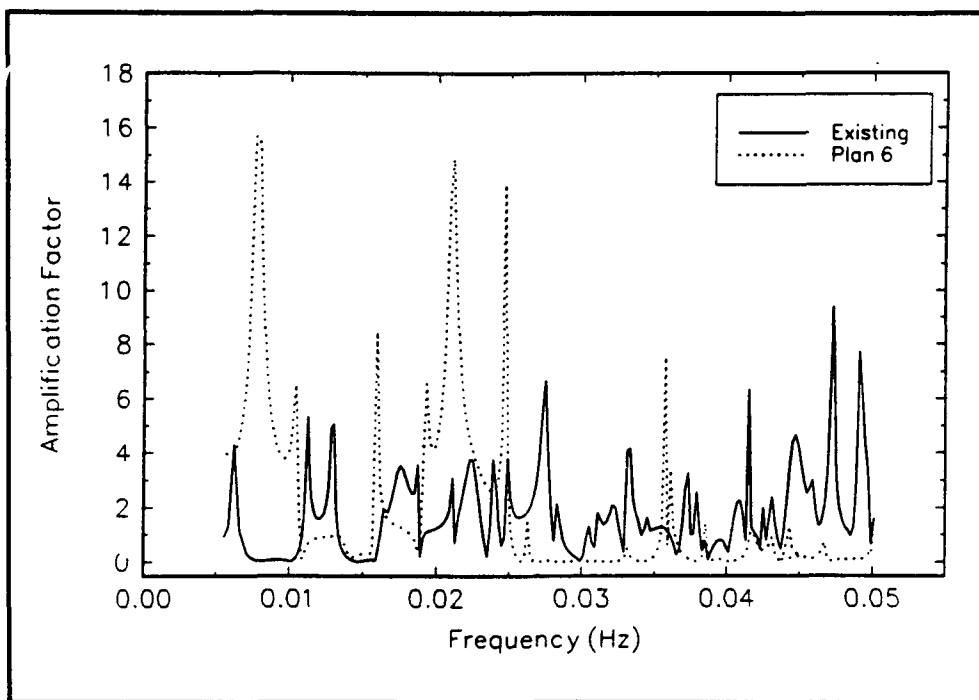


Figure B10. Wave amplification factor, basin 10

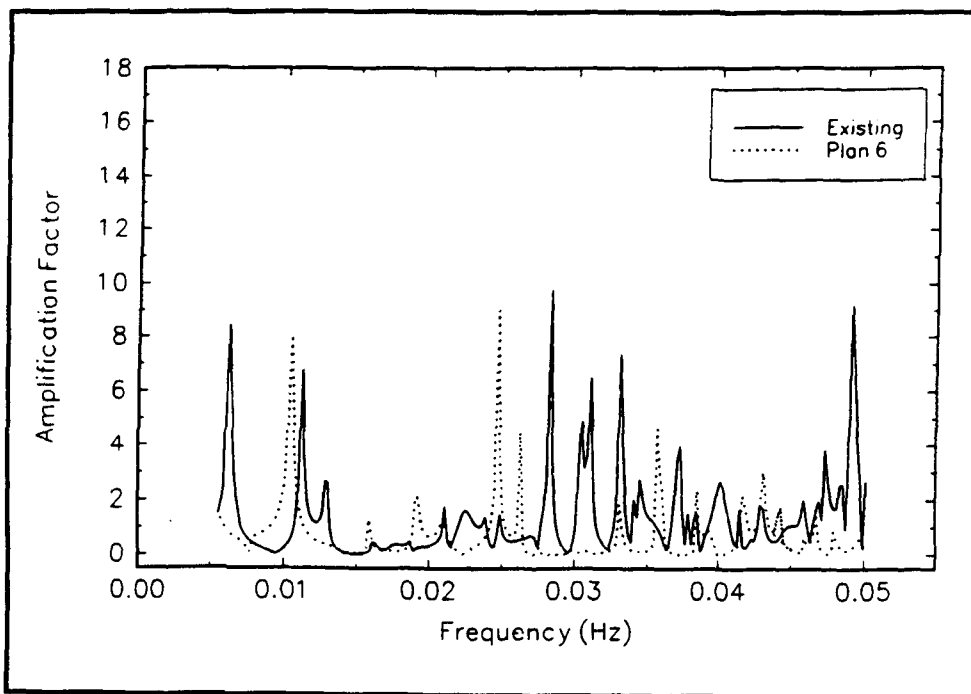


Figure B11. Wave amplification factor, basin 11

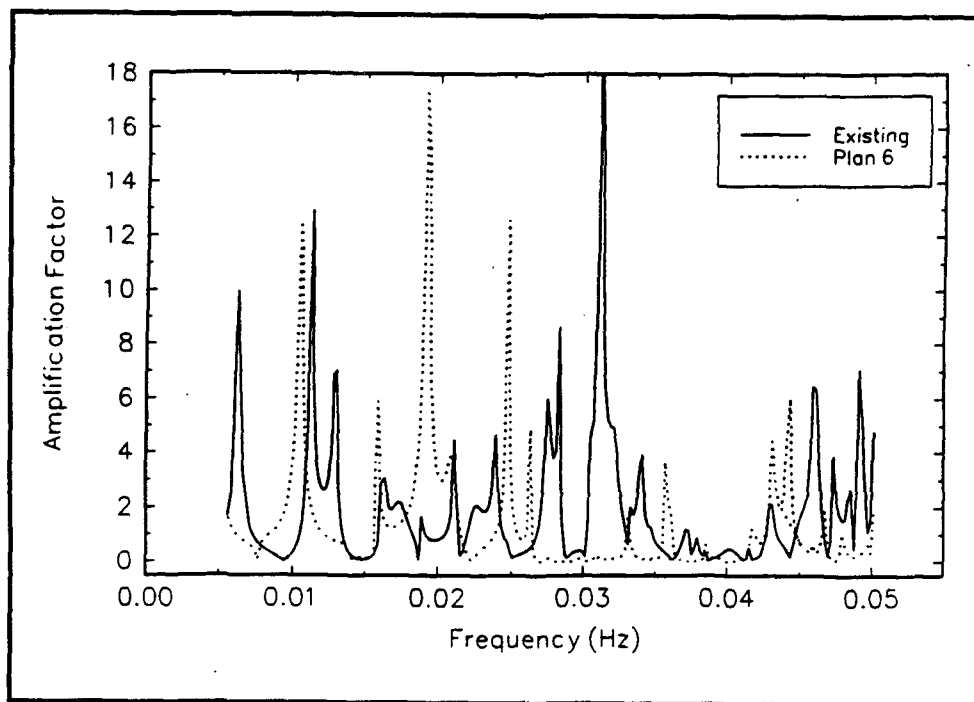


Figure B12. Wave amplification factor, basin 12

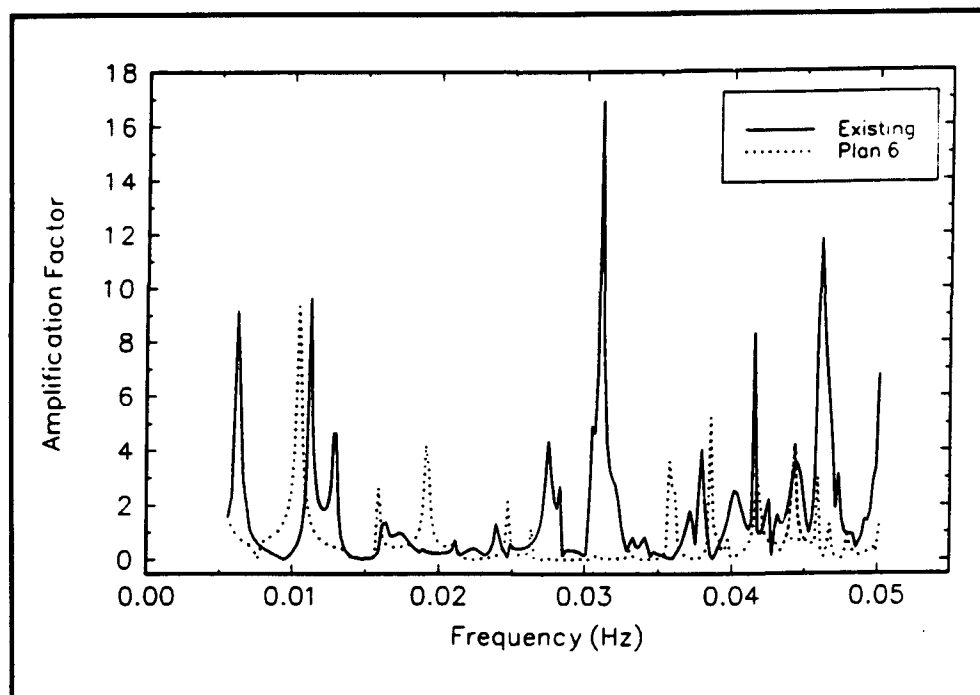


Figure B13. Wave amplification factor, basin 13

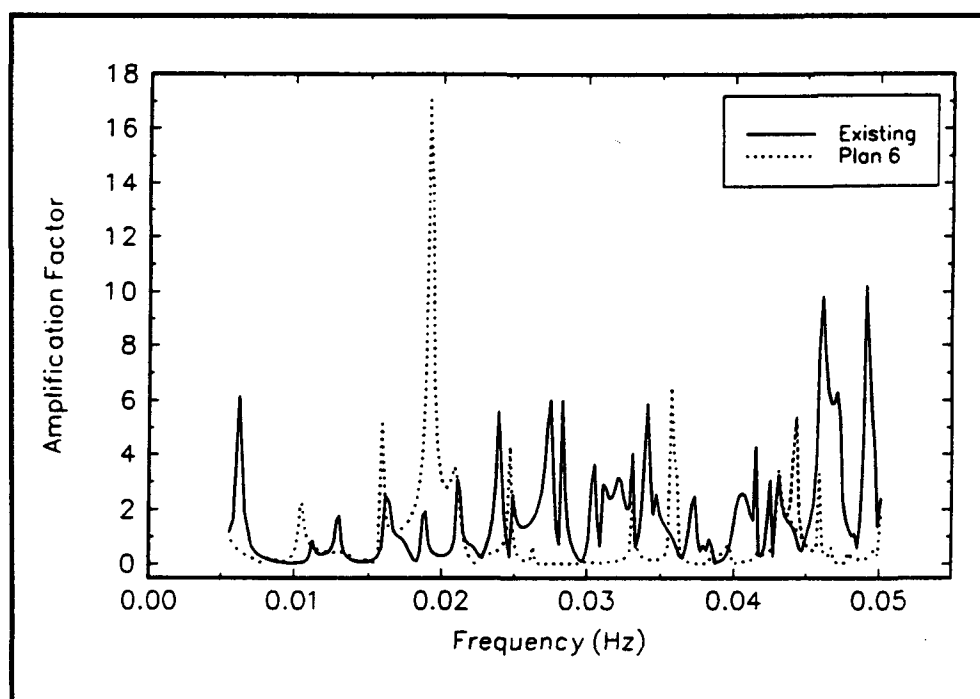


Figure B14. Wave amplification factor, basin 14

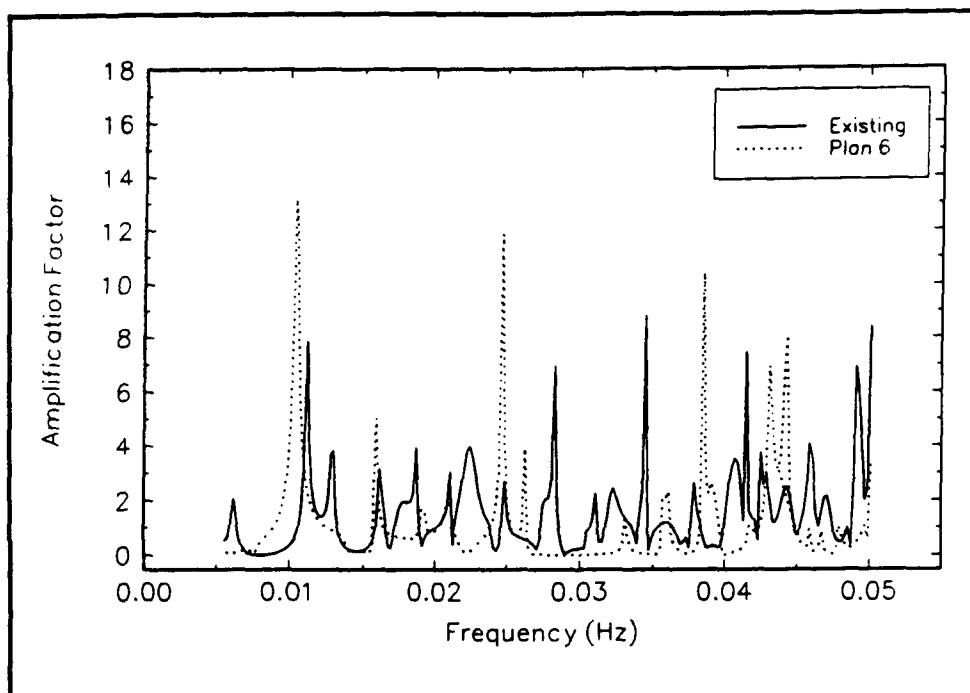


Figure B15. Wave amplification factor, basin 15

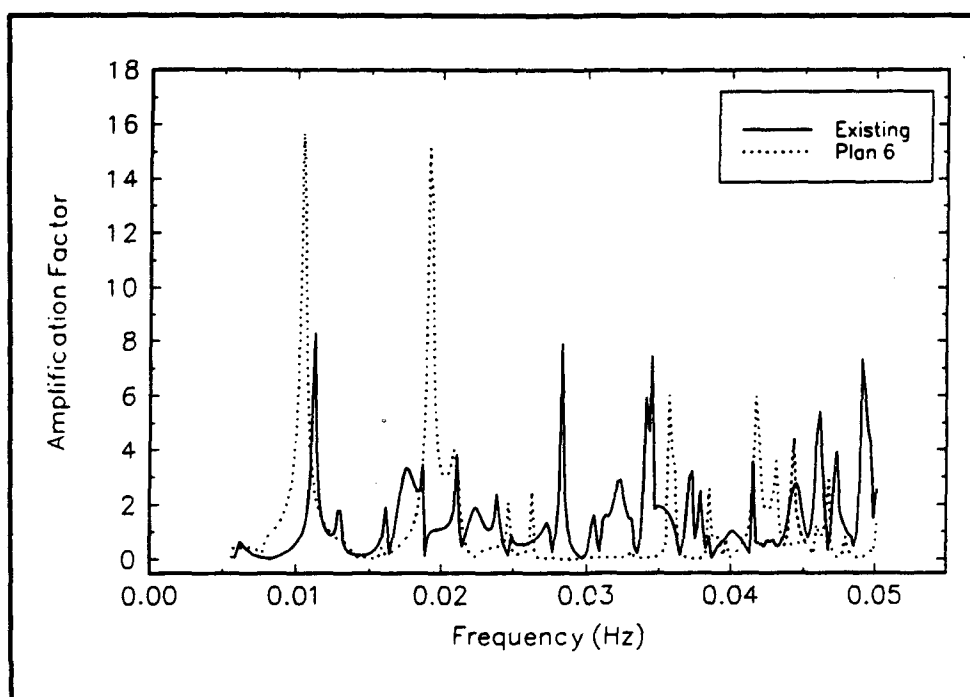


Figure B16. Wave amplification factor, basin 16

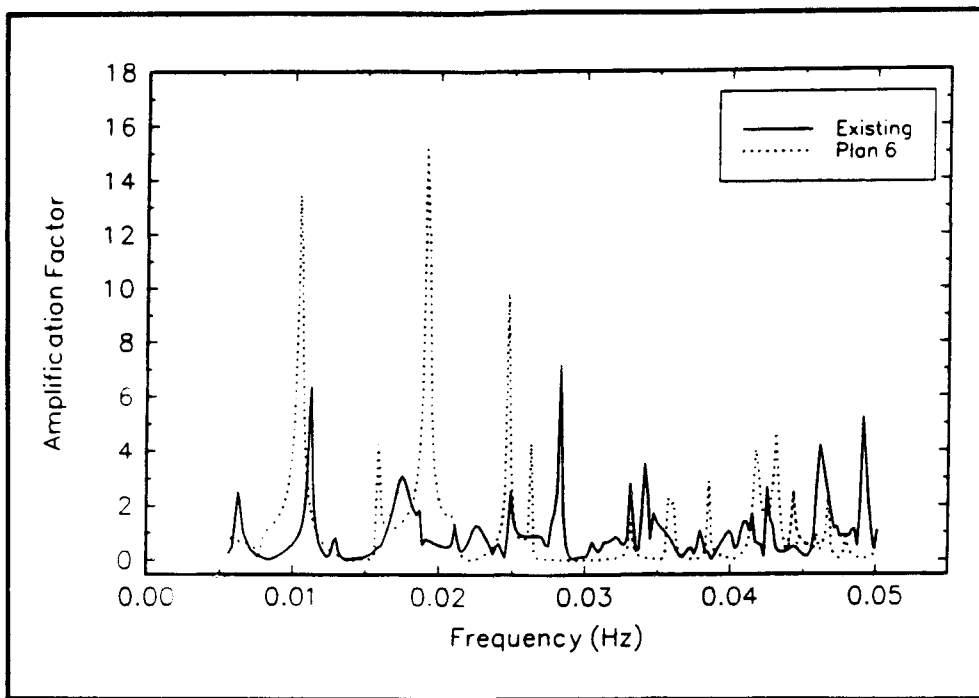


Figure B17. Wave amplification factor, basin 17

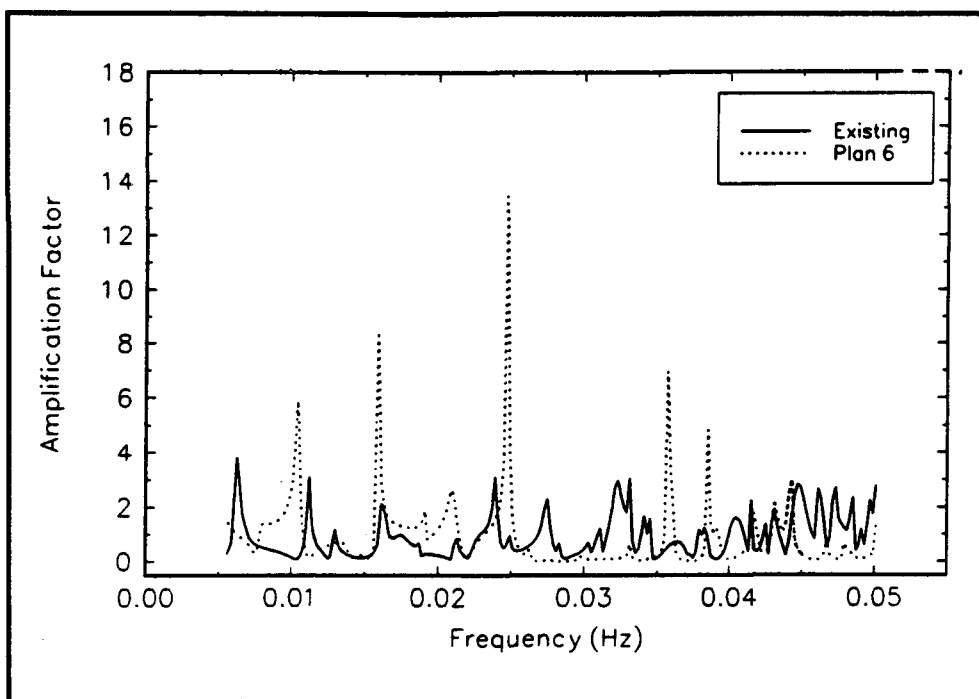


Figure B18. Wave amplification factor, basin 18

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE September 1994	3. REPORT TYPE AND DATES COVERED Final report	
4. TITLE AND SUBTITLE Wave Response of Proposed Improvement Plan 6 to the Small Boat Harbor at Maalaea, Maui, Hawaii			5. FUNDING NUMBERS	
6. AUTHOR(S) Edward F. Thompson, Lori L. Hadley				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Engineer Waterways Experiment Station 3909 Halls Ferry Road, Vicksburg, MS 39180-6199			8. PERFORMING ORGANIZATION REPORT NUMBER Miscellaneous Paper CERC-94-17	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Engineer Division, Pacific Ocean Bldg. 230, Fort Shafter, HI 96858-5440			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES Available from National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) <p>The U.S. Army Engineer Division, Pacific Ocean (CEPOD) requested that the U.S. Army Engineer Waterways Experiment Station numerically study the wave response of proposed improvement Plan 6 to the small boat harbor at Maalaea, Maui, Hawaii. The study is an extension of an earlier study to assess the wave response of the existing harbor and five other proposed modification plans. Wave periods tested ranged from 9 sec to 180 sec, encompassing wind waves and swell conditions and harbor oscillations. Since harbor oscillations were not investigated in the earlier study, the existing harbor was included in this study.</p> <p>The results of this study show that Plan 6 provides the harbor with adequate protection from the incident wind wave and swell climate. Navigation during high wave conditions is potentially hazardous in Plan 6 relative to the other plans because much of the entrance channel is confined between two rock-faced structures. Plan 6 can potentially lead to a significant increase in the amplitude of harbor oscillations.</p>				
14. SUBJECT TERMS Finite element Harbor Hawaii			15. NUMBER OF PAGES 47	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT	